



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	PRELIMINARY	04/17/03	P.PESA
B	ADDED STRIPPING DIMS	09/18/07	-
C	ECN 6673 CHANGE FERRULE CRIMP SIZE TO .128, UPDATE FORMAT, REV. NOTES	02/07/13	B.PUCHASKI

DESCRIPTION	MATERIAL	FINISH
BODY	BRASS	NICKEL PLATE
CONTACT	BRASS	GOLD PLATE
DIELECTRIC	TEFLON	-

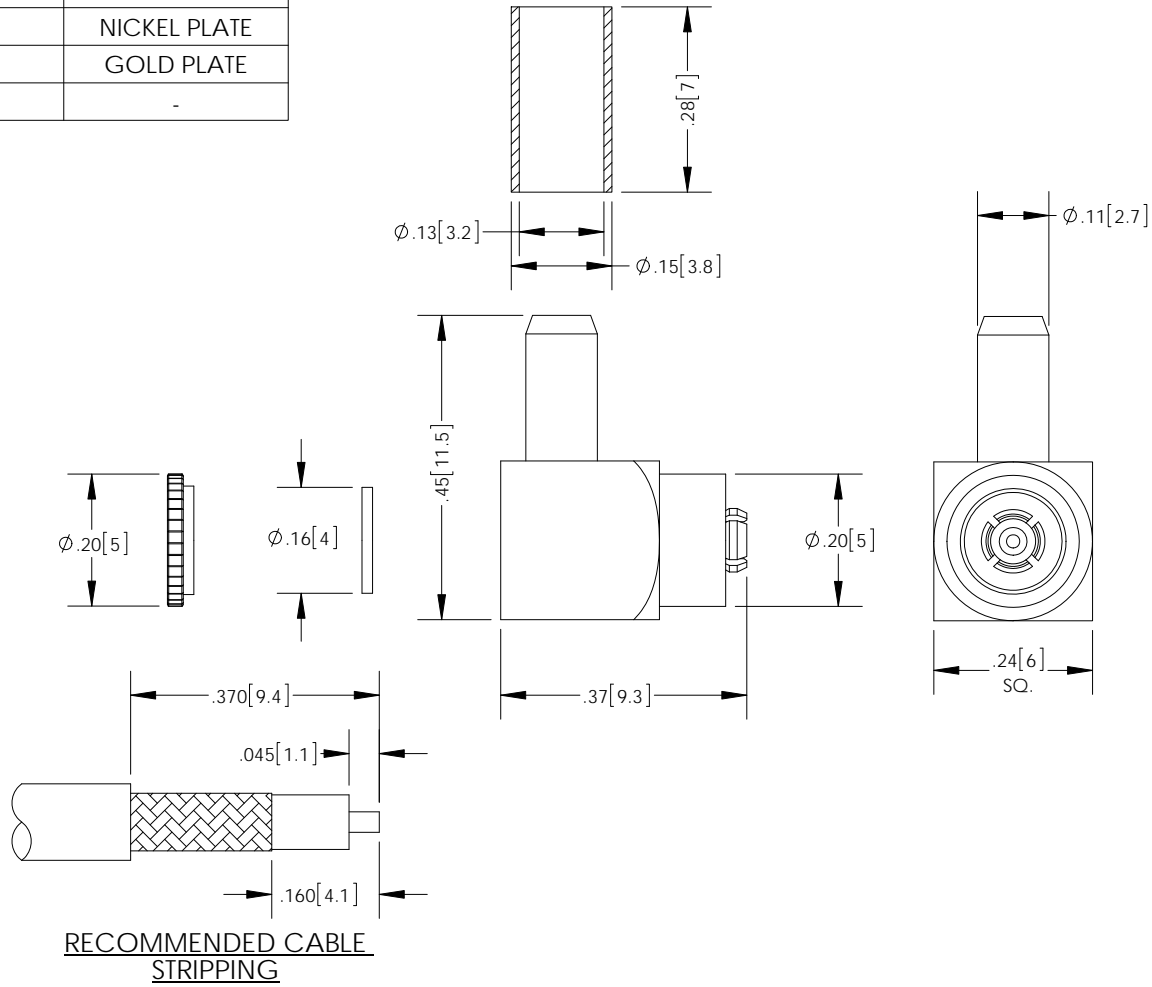

RECOMMENDED FERRULE CRIMP SIZE



RECOMMENDED CABLE STRIPPING

NOTES:

PACKAGING: BULK PACAKAGED 10 PER BAG

ELECTRICAL:
 IMPEDANCE: 50 OHM
 FREQUENCY RANGE: 0 - 6 GHz
 VOLTAGE RATING: 335 VOLTS PEAK
 INSERTION LOSS: .20 dB MAX.
 APPLICATIONS: LMR100, RG316/174/188

- ALL DIMENSIONS FOR REFERENCE ONLY -

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY B.PUCHASKI	02/07/13		
DIMENSIONAL TOLERANCES: .X = ±.1 .XX = ±.01 .XXX = ±.005	CHECKED BY K.BURGNER	02/07/13	CATEGORY COAXIAL	
	APPROVED BY K.BURGNER	02/07/13	PRODUCT DESCRIPTION ORINOCO®/AP COMPATIBLE (AIProx) MALE R/A CRIMP CONNECTOR	
ANGULAR TOLERANCES: ALL = ± 1°	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE A	FSCM NO. 43321
PROJECTION	COLOR VARIATIONS MAY OCCUR		DWG. NO. AAPM-1100	REV. C
		SCALE: NONE	CAD FILE: AAPM-1100.SLDDRW	SHEET 1 OF 1