

6

5

4

3

2

1

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	B1	UPDATED PER ECO-14033	12/4/2024	DMAY	REVANGELIS

F

F

E

E

D

D

C

C

B

B


A

A

"P1"  
USB 3.2 TYPE A PLUG



.48  
[12.3]

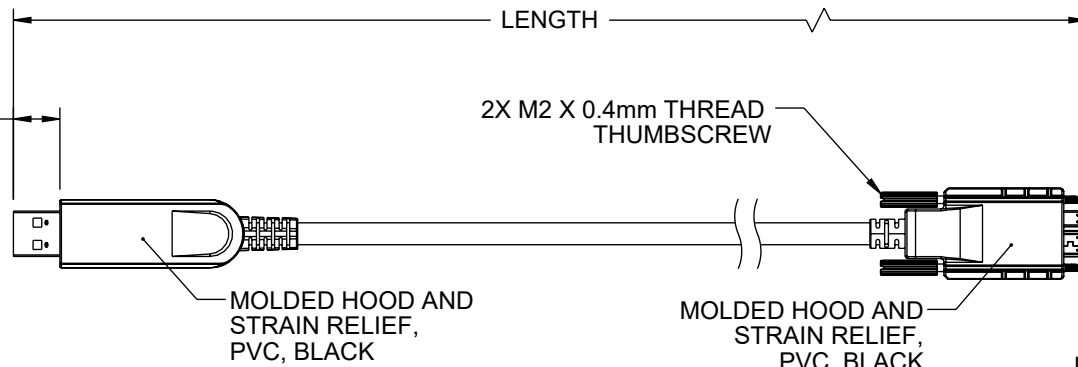

MOLDED HOOD AND  
STRAIN RELIEF,  
PVC, BLACK

MOLDED HOOD AND  
STRAIN RELIEF,  
PVC, BLACK

"P2"  
USB 3.2 MICRO-B PLUG

.71  
[18]

LENGTH

2X M2 X 0.4mm THREAD  
THUMBSCREW

USB 3.0 HIGH FLEX CABLE  
JACKET: PVC, BLACK  
NOM DIA.: .217" [5.5]

.24  
[6]

NOTES:

- CABLE TYPE-U DRAG CHAIN TESTING:  
5 MILLION CYCLES MIN.(75mm BEND RADIUS)
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PART NUMBER	LENGTH METERS [FT]
AOC-U30AMIM-C1S-005	05 [16.4]
AOC-U30AMIM-C1S-008	08 [26.3]
AOC-U30AMIM-C1S-010	10 [32.8]
AOC-U30AMIM-C1S-015	15 [49.2]
AOC-U30AMIM-C1S-020	20 [65.6]
AOC-U30AMIM-C1S-030	30 [98.4]

UNLESS OTHERWISE SPECIFIED  
LEADING DIMENSIONS ARE INCHES  
DIMENSIONS IN [ ] ARE MILLIMETERS


TOLERANCES:  
X = ±.2 [5]      FRACTIONS  
XX = ±.02 [0.5]      ± 1/32  
.XXX = ±.005 [0.13]      ANGLES ± 1°

CABLE LENGTH TOLERANCES:  
≤12 [305] = +1 [25] / -0  
>12 [305] ≤ 60 [1524] = +2 [51] / -0  
>60 [1524] ≤ 120 [3048] = +4 [102] / -0  
>120 [3048] ≤ 300 [7620] = +6 [152] / -0  
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
AND SUBJECT TO CHANGE WITHOUT NOTICE.  
UN-DIMENSIONED NON-CRITICAL FEATURES  
MAY VARY IN SIZE AND LOCATION  
COLORS MAY VARY

**L-com**  
an INFINIT® brand

Website: www.L-com.com  
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
TOLERANCES PER ASME Y14.5

SCALE      SHEET  
NONE      1 OF 1

DESCRIPTION

USB 3.2 GEN 1 ACTIVE OPTICAL CABLE, A MALE TO MICRO-B  
MALE DRAG CHAIN JACKET W/ SCREW, 5Gps

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	VTHANGARAJ	AOC-U30AMIM-C1S	B1

6

5

4

3

2

1