


REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
D4	G2	ECO-14457	03/31/2025	AKRESOWSKI	DGUST

USB BULK CABLE SPECIFICATION

DESCRIPTION: USB CABLE REV 2.0			
ITEM	COMPONENT A	COMPONENT B	
CONSTRUCTION AWG	28 AWG	28 AWG	
CONDUCTORS	CONDUCTOR SIZE	7/.005 ± .0003 [.127 ± .008]	7/.005 ± .0003 [.127 ± .008]
	MATERIAL	STRANDED TINNED COPPER	STRANDED TINNED COPPER
INSULATION	MATERIAL	POLYOLEFIN	POLYOLEFIN
	DIAMETER, IN [MM]	.031 ± .003 [.78 ± .08]	.026 ± .003 [.65 ± .08]
TAPE	MATERIAL	ALUMINUM MYLAR	
	COVERAGE, %	125	
BRAID SHIELD	MATERIAL	TINNED COPPER	
	COVERAGE, %	65	
DRAIN WIRE	CONDUCTOR SIZE	7/.005 ± .0003 [.127 ± .008] (28AWG)	
	MATERIAL	STRANDED TINNED COPPER	
JACKET	MATERIAL	PVC	
	DIAMETER, IN [MM]	.130 ± .008 [3.3 ± 0.2]	
	COLOR	BLACK	
MARKING	USB Revision 2.0 SHIELDED 28 AWG/2C+28 AWG/2C (UL) AWM 2725 80°C 30V VW-1 Exxxxx WWW.L-COM.COM		
ELECTRICAL PROPERTIES			
ITEM	COMPONENT A	COMPONENT B	
CONDUCTOR RESISTANCE	239 Ω/KM @ 68°F [20°C] MAX	239 Ω/KM @ 68°F [20°C] MAX	
INSULATION RESISTANCE	100 MΩ-KM @ 68°F [20°C] MIN	100 MΩ-KM @ 68°F [20°C] MIN	
DIELECTRIC STRENGTH	500 VAC/1 MIN	500 VAC/1 MIN	
IMPEDANCE	90 Ω ± 15%	/	
VOLTAGE RATING	30V		
PHYSICAL PROPERTIES			
OPERATING TEMPERATURE RANGE	- 4°F [-20°C] TO 140°F [60°C]		
STORAGE TEMPERATURE RANGE	- 4°F [-20°C] TO 176°F [80°C]		
MIN. BEND RADUIS	10X OD		
FLAME TEST	VW-1		
PACKAGING: 100.0 FT/LOGO BAG; 500.0 FT/SPOOL W/STRETCH WRAP; 1,000.0 FT/ W/STRETCH WRAP			
CABLE TO BE REACH AND RoHS COMPLIANT			

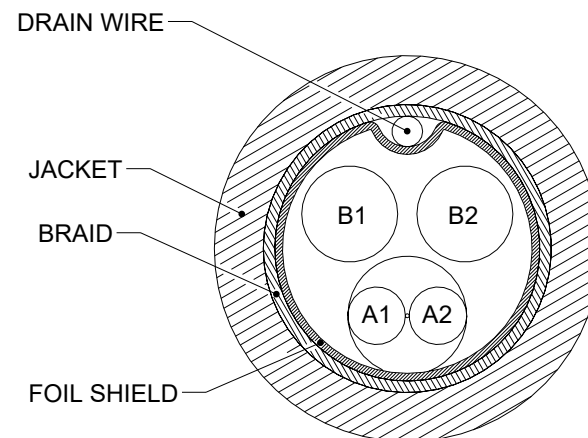

CROSS-SECTIONAL VIEW

COLOR CODE

- A1. WHITE
- A2. GREEN
- B1. BLACK
- B2. RED

MODEL NO.	LENGTH
CBL-USB2-2828-100	100 FEET
CBL-USB2-2828-500	500 FEET
CBL-USB2-2828-1000	1000 FEET

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS


TOLERANCES:
 X = ±.2 [5] FRACTIONS
 .XX = ±.02 [0.5] ± 1/32
 .XXX = ±.005 [0.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:
 ≤12 [305] = +1 [25] / -0
 >12 [305] ≤ 60 [1524] = +2 [51] / -0
 >60 [1524] ≤ 120 [3048] = +4 [102] / -0
 >120 [3048] ≤ 300 [7620] = +6 [152] / -0
 >300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE.
UN-DIMENSIONED/NON-CRITICAL FEATURES
MAY VARY IN SIZE AND LOCATION
COLORS MAY VARY



Website: www.L-com.com
Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION				
CABLE, USB 2.0				
SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	D. PARHAM	CBL-USB2-2828	G2

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.