


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES DG259MF-IBM-OD1	6/24/14	D. DESJARDIN

WIRING MAP	
"J1"	"P1"
DB9F	DB25M
PIN 1	PIN 8
PIN 2	PIN 3
PIN 3	PIN 2
PIN 4	PIN 20
PIN 5	PIN 7
PIN 6	PIN 6
PIN 7	PIN 4
PIN 8	PIN 5
PIN 9	PIN 22
SHELL	SHELL

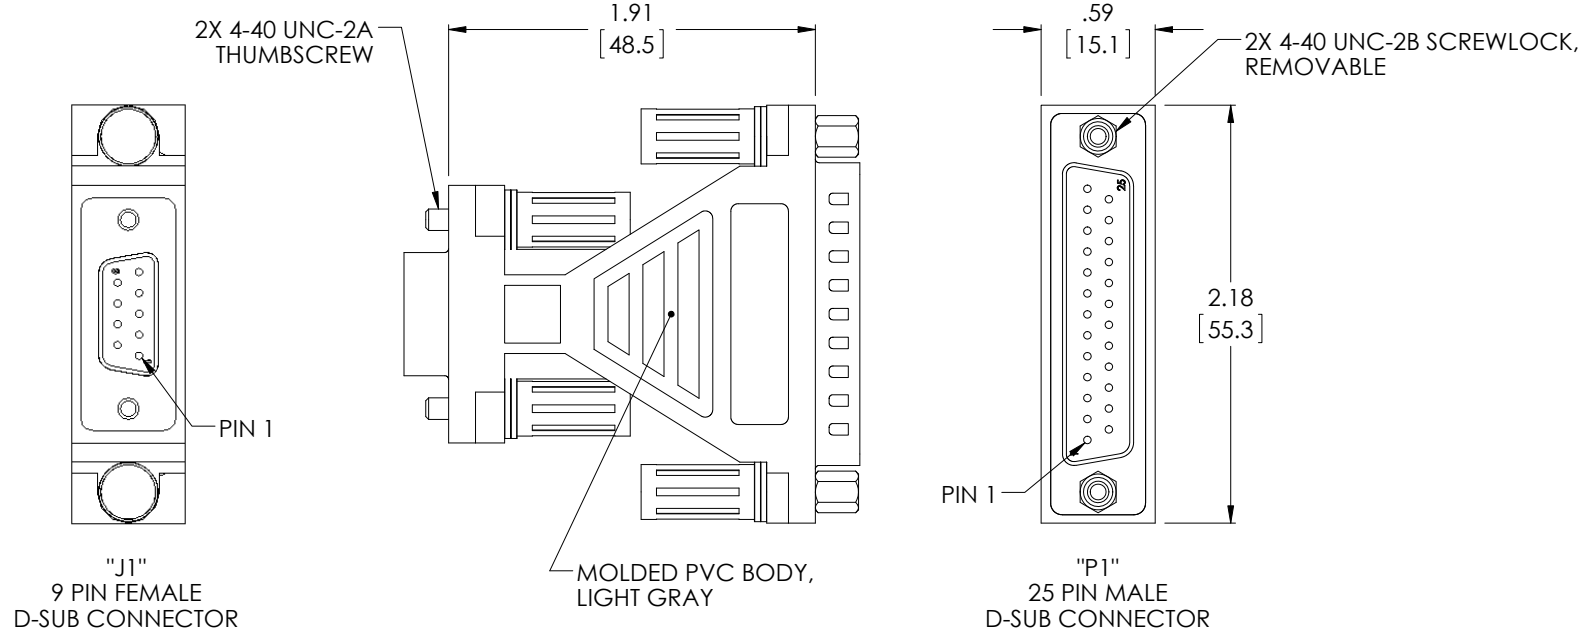

**NOTES:**

- INTERNAL 360° COPPER FOIL SHIELD HAS DRAIN WIRE SOLDERED TO METAL FRAME OF BOTH CONNECTORS.
- COMPONENT SHALL BE TESTED FOR CONTINUITY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.13]	APPROVALS TJC CHECKED BY DFP APPROVED BY CM	DATE 1/10/02 1/11/02 1/11/02	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY <b>D-SUBMINIATURE</b>
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION <b>ADPT, AT MODEM DB25M/DB9F</b>
	PROJECTION 	DWG. NO. <b>DG259MF-IBM</b>	SCALE: NONE CAD FILE: DG259MF-IBM.SLDDRW

D  
C  
B  
A

D  
C  
B  
A

8 7 6 5 4 3 2 1

8 7 6 5 4 3 2 1