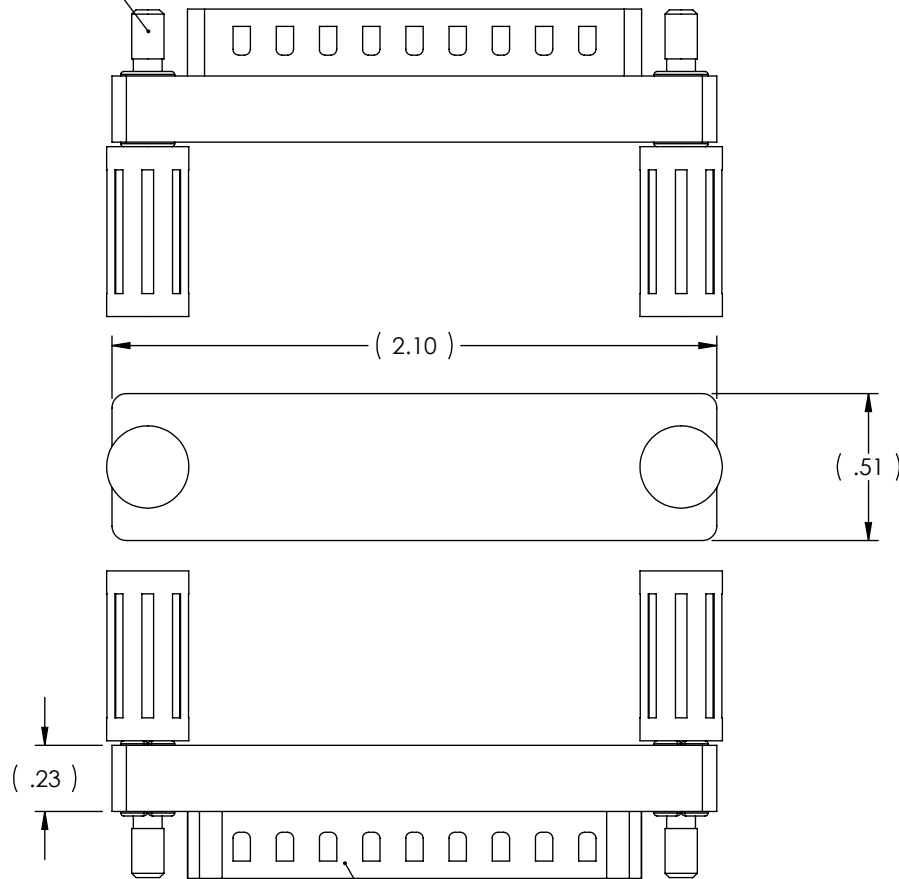


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED TO PRODUCTION	11/14/00	R.CARRICK
B	REVISED THUMB SCREWS PER ECO # 0829	01/15/01	MCCORMICK
C	ECN 3370: REMOVE PANTONE 2945 BLUE/TEXT COLOR WHITE FROM NOTE 7	6/6/08	D.GRIFFIN
D	ECN5138: REMOVE LABEL REQUIREMENTS. ADDED PKG NOTE. UPDATED FORMAT.	11/12/10	DFP

2X 4-40 UNC-2A THREAD





WIRE DIAGRAM	
DB25M	DB25M
PIN 4	PIN 15
PIN 5	PIN 17
PIN 6	PIN 13
PIN 7	PIN 12
PIN 8	PIN 10
PIN 9	PIN 11

NOTES:

1. ALL- METAL HOUSING PROVIDES 100% SHIELDING.
2. CONNECTOR CONTACTS PLATING; GOLD FLASH.
3. INSULATOR MATERIAL; GLASS FILLED PBT U.L. RECOGNIZED 94V-0 RATED.
4. LOOPBACK ADAPTOR USES PINS IN WIRE DIAGRAM ONLY.
5. JACKSCREW PLATING; NICKEL PLATED.
6. ALL OTHER METAL COMPONENTS PLATING; TIN PLATED.
7. ADAPTOR TO BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
8. DRAWING SUPERSEDES DRAWING #96-060102.



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: <math>\le 12 [305] = +1 [25] / -0</math> <math>>12 [305] \le 60 [1524] = +2 [51] / -0</math> <math>>60 [1524] \le 120 [3048] = +4 [102] / -0</math> <math>>120 [3048] \le 300 [7620] = +6 [152] / -0</math> <math>>300 [7620] = +3\% / -0\%</math>	APPROVALS	DATE	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY RON CARRICK	10/4/2000	
ALL OTHER DIMENSIONAL TOLERANCES: .X = $\pm .2$ .XX = $\pm .02$ .XXX = $\pm .005$	CHECKED BY TJC	10/23/2000	CATEGORY  <b>DATA CABLING</b>
	APPROVED BY DFP	10/23/2000	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION <b>ADPT, LOOPBACK PARALELL TEST DB25M</b>	
	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
		DWG. NO. <b>DMA019S</b>	REV. <b>D</b>
		SCALE: NONE	CAD FILE: DMA019S.SLDDRW
			SHEET 1 OF 1