


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

| REVISIONS | | | |
|-----------|---|------------|-------------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 05/26/2022 | DGUTTADAURO |
| B | ECN 11899; UPDATE DIM. FROM 1.59" TO 1.53" AS PER THE LATEST SPEC | 06/15/2022 | DGUTTADAURO |
| | | | |
| | | | |

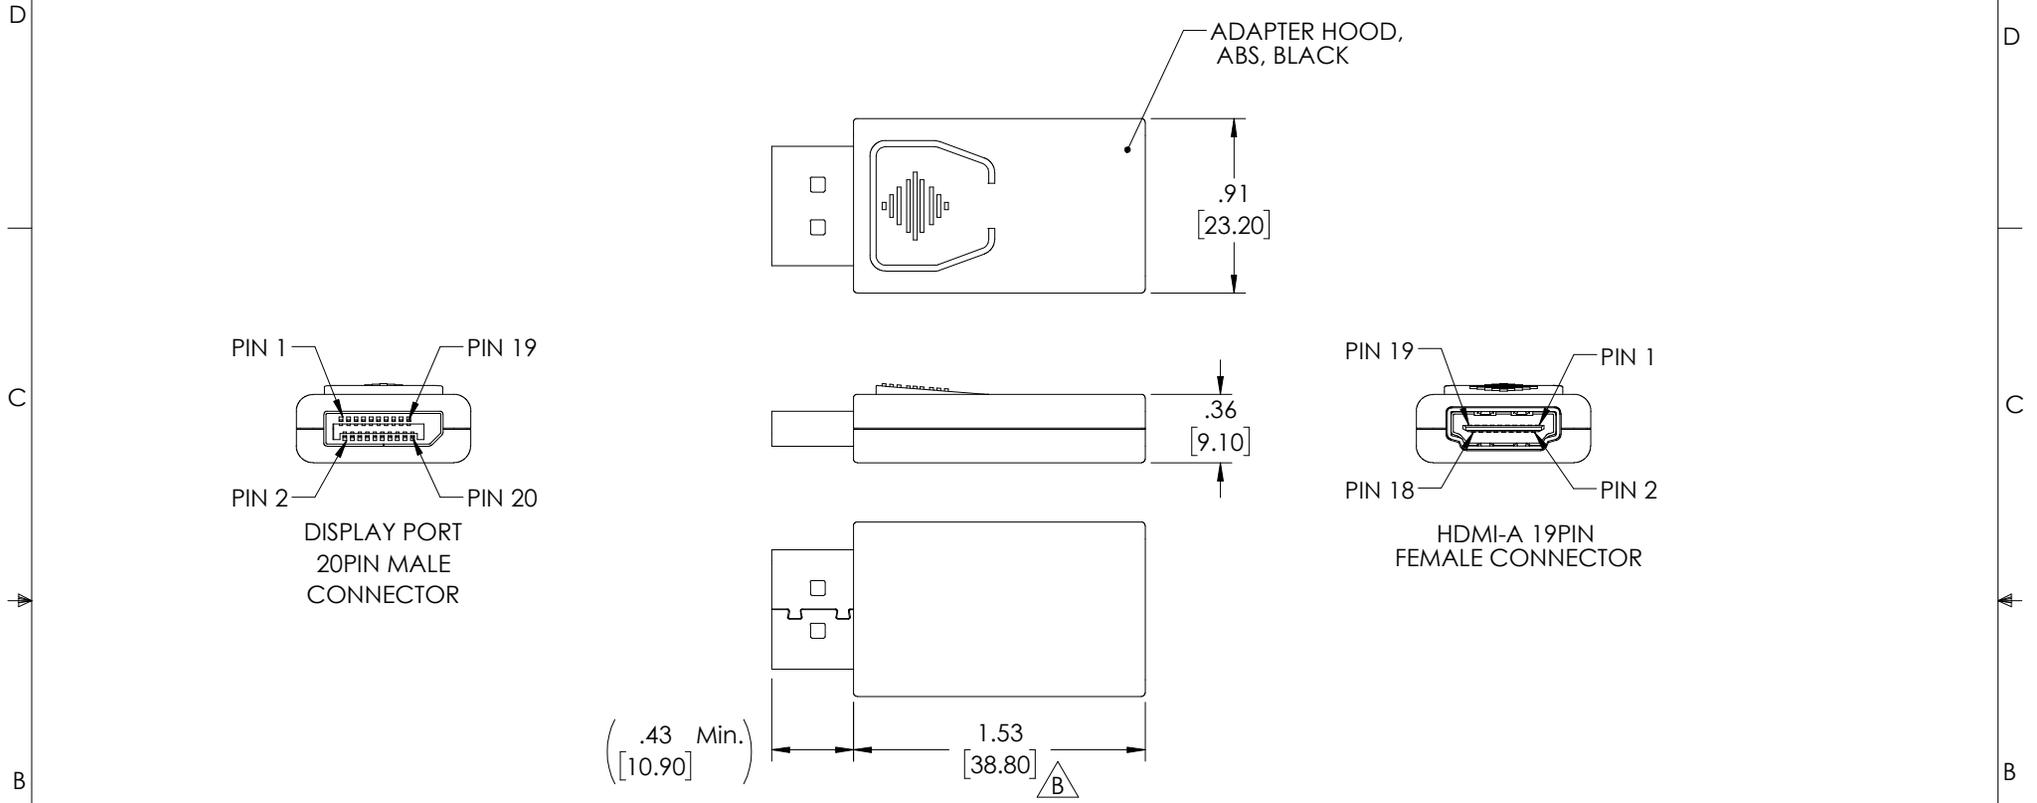


NOTE

- VOLTAGE RATING:40VAC; CURRENT RATING: 0.5A
OPERATING TEMPERATURE RANGE: -20°C ~+70°C
- ALL CONNECTORS HAVE NICKEL PLATED SHELLS AND GOLD PLATED CONTACTS.
- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- ADAPTOR SHALL BE 1080P@60Hz FUNCTIONAL TESTED PRIOR TO SHIPPING.
- ADAPTOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
- DUST COVERS OF DP MALE END INSTALLED FOR SHIPPING (NOT SHOWN).

REGULATORY COMPLIANCE:

EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

| | | | | |
|---|--|--|---|--|
| UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [1.3] | APPROVALS DRAWN BY BZHANG CHECKED BY KGU APPROVED BY DGUTTADAURO | DATE 05/24/2022 05/24/2022 05/24/2022 |  an INFINIT® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 | |
| | CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR | | | CATEGORY AUDIO/VIDEO PRODUCT DESCRIPTION DP M TO HDMI-A F ADAPTER |
| THIRD-ANGLE PROJECTION  | SIZE A | CAGE CODE 43321 | DWG. NO. DPHDAD | REV. B |
| SCALE: NONE | | CAD FILE: DPHDAD.SLDDRW | | SHEET 1 OF 1 |