

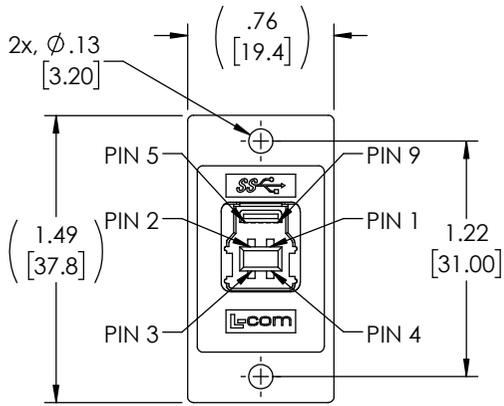


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/16/2021	D.GUTTADAURO

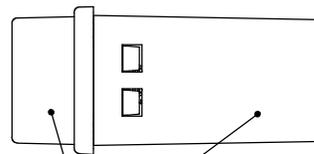



"J1"
USB 3.0 TYPE "B"
FEMALE CONNECTOR
30u" GOLD PLATED CONTACTS
NICKEL PLATED SHELL

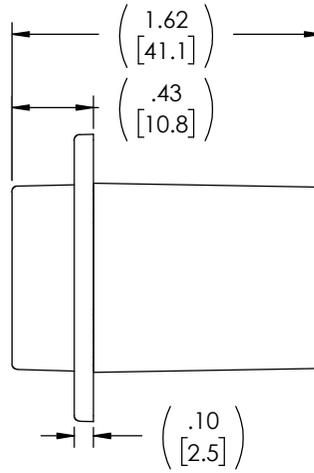

ABS ADAPTER SHIELDED HOUSING,
FINISH: CHROME

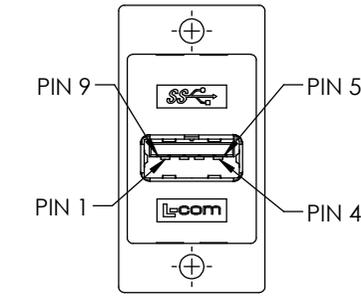


"J2"
USB 3.0 TYPE "A"
FEMALE CONNECTOR
30u" GOLD PLATED CONTACTS
NICKEL PLATED SHELL

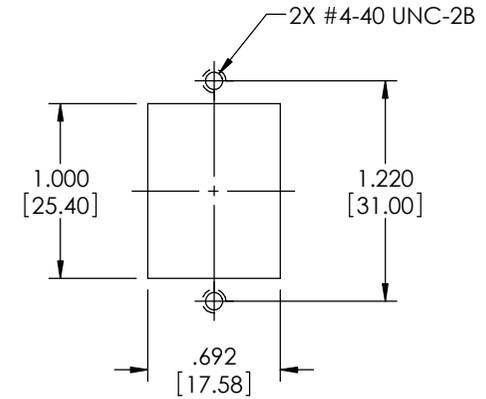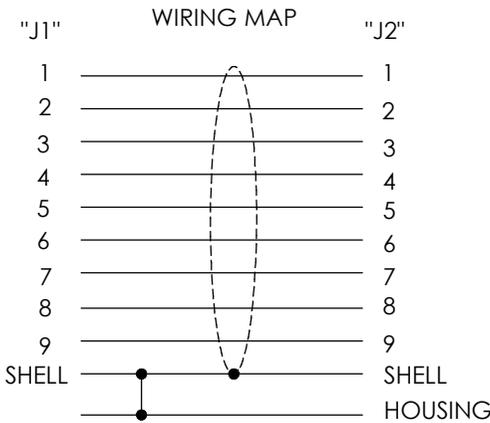

RECOMMENDED
PANEL CUTOUT

NOTES:

- RATING**
CURRENT: 1.8A (P1 and P4 CONTACT); 0.25A (OTHER CONTACTS)
VOLTAGE: 30V max.
OPERATING TEMPERATURE: -10°C TO +70°C.
- TYPE "B" CONNECTOR MATING FORCE: 40N Max.**
UN-MATING FORCE: 15N Min.
TYPE "A" CONNECTOR MATING FORCE: 40N Max.
UN-MATING FORCE: 15N Min.
- COUPLER SHALL BE TESTED FOR CONTINUITY.**
- COUPLER SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPEC PS-0031.**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: <12 [305] ≤+1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS .XX = ± .02 [5] ± 1/32 .XXX = ± .005 [1.3] ANGLES ± 1°	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936				
	DRAWN BY B.ZHANG	01/11/2021		CATEGORY USB			
	CHECKED BY D.GUTTADAURO	01/11/2021	PRODUCT DESCRIPTION USB3.0 ADPT, HI-RETENTION PNL MNT B-F/A-F SHLD				
	APPROVED BY D.GUTTADAURO	01/11/2021	<table border="1"> <tr> <td>SIZE A</td> <td>CAGE CODE 43321</td> <td>DWG. NO. ECF504-30-BAS-HR</td> <td>REV. A</td> </tr> </table>	SIZE A	CAGE CODE 43321	DWG. NO. ECF504-30-BAS-HR	REV. A
SIZE A	CAGE CODE 43321	DWG. NO. ECF504-30-BAS-HR	REV. A				
THIRD-ANGLE PROJECTION 	COLOR VARIATIONS MAY OCCUR	SCALE: NONE	CAD FILE: ECF504-30-BAS-HR.SLDRW				