


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	1/11/18	D.FRISIELLO

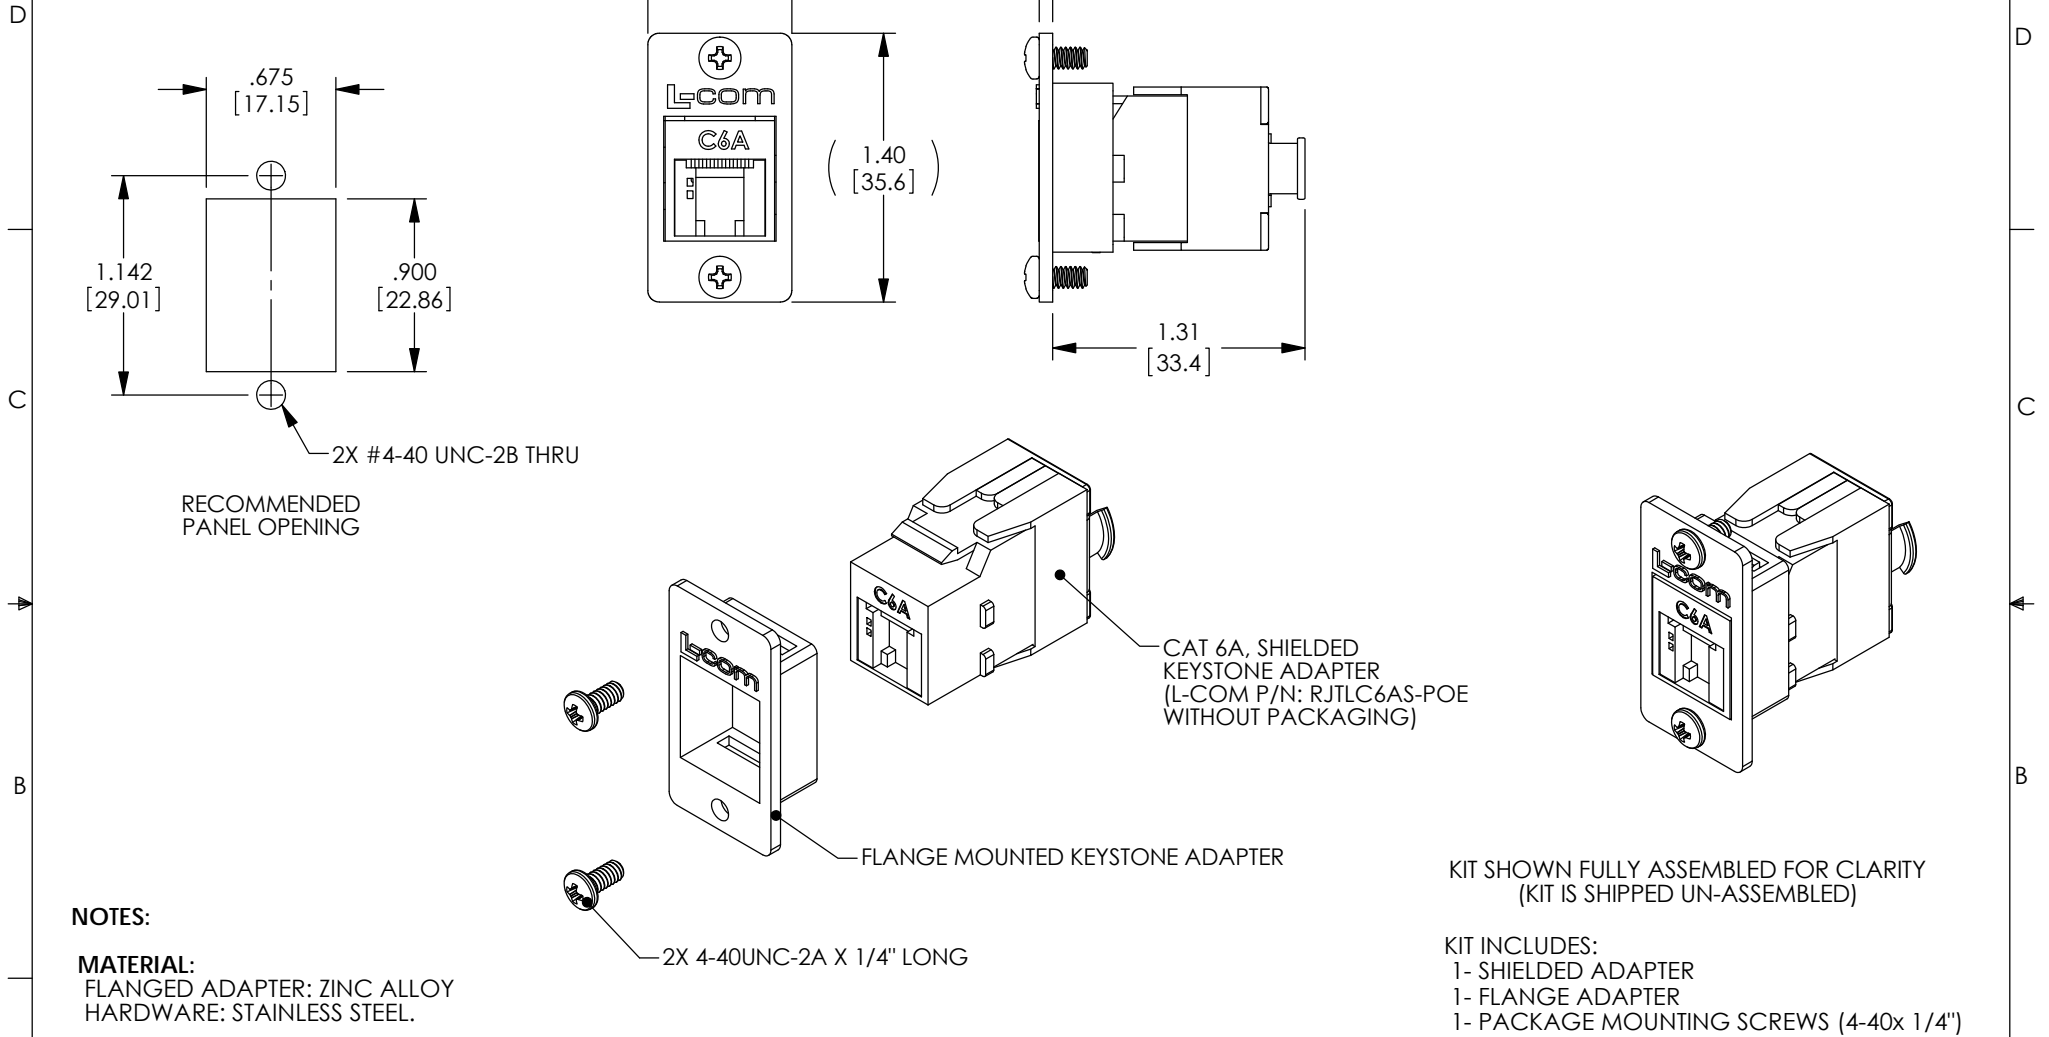

NOTES:

MATERIAL:
 FLANGED ADAPTER: ZINC ALLOY
 HARDWARE: STAINLESS STEEL.

FINISH:
 FLANGED ADAPTER: NICKEL PLATE.

MISCELLANEOUS:
 DC CURRENT RATING: 1.5 AMPS

PACKAGING:
 KIT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

CAT 6A, SHIELDED
 KEYSTONE ADAPTER
 (L-COM P/N: RJTLC6AS-POE
 WITHOUT PACKAGING)

FLANGE MOUNTED KEYSTONE ADAPTER

2X 4-40UNC-2A X 1/4" LONG

KIT SHOWN FULLY ASSEMBLED FOR CLARITY
 (KIT IS SHIPPED UN-ASSEMBLED)

KIT INCLUDES:
 1- SHIELDED ADAPTER
 1- FLANGE ADAPTER
 1- PACKAGE MOUNTING SCREWS (4-40x 1/4")

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [1.27]	APPROVALS D.FRISIELLO	DATE 1/11/18					50 HIGH STREET NORTH ANDOVER, MA 01845
	CHECKED BY D.GUITADAURO	1/11/18	CATEGORY TELECOM / MODULAR				
	APPROVED BY D.GUITADAURO	1/11/18	PRODUCT DESCRIPTION ECF C6a Shld KSJ RJ45/TL PoE+				
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. ECFRJTL6AS-POE	REV. A	SCALE: NONE
PROJECTION 	CAD FILE: ECFRJTL6AS-POE.SLDDRW		SHEET 1 OF 1				