



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES FOA-015-OD1	9/24/14	D. CASTRO

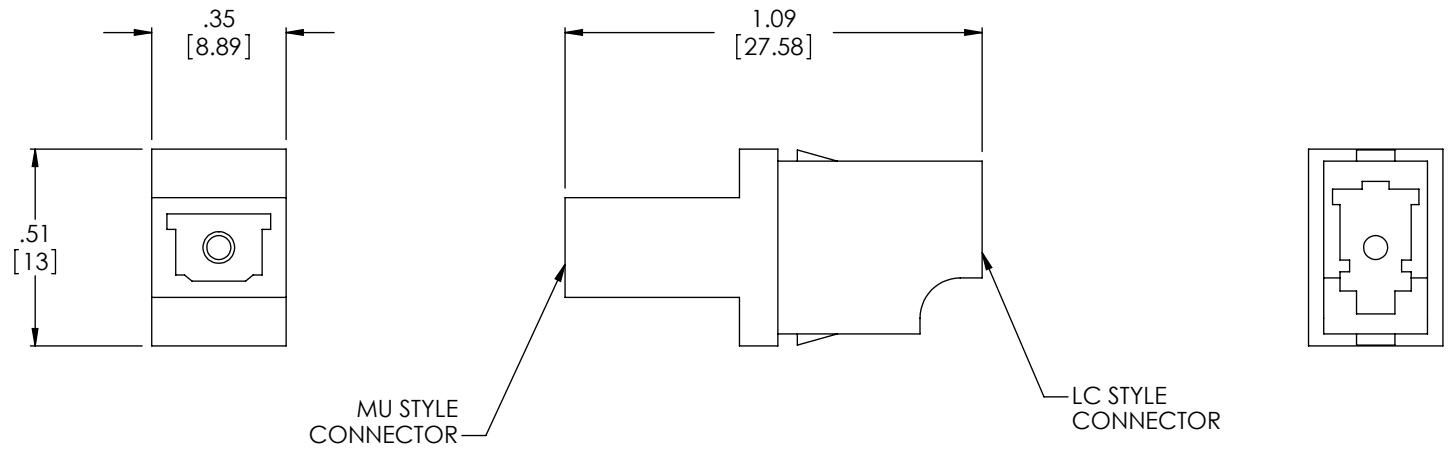

RECOMMENDED LC  
PANEL OPENING

NOTES;

MATERIAL:

- LC HOUSING: POLYETHERIMIDE (PEI) UL94V-0.
- MU HOUSING: POLYPHENYLENE SULFIDE (PPS) UL94V-0.
- SLEEVE: ZIRCONIA.
- DUST CAP: POLYPROPYLENE.

MISCELLANEOUS:

- SHIPPED WITH DUST CAPS INSTALLED (NOT SHOWN).
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
- RECOMMENDED PANEL THICKNESS: 0.06"

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY C.MCCORMICK	07/11/2003		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [51] .XXX = ± .005 [13]	CHECKED BY D.PARHAM	07/11/2003	CATEGORY <b>FIBER OPTICS</b>	
	APPROVED BY R.CARRICK	07/11/2003	PRODUCT DESCRIPTION <b>FIBR ADPTR LC TO MU SMLPX</b>	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>
			DWG. NO. <b>FOA-015</b>	REV. <b>A</b>
			SCALE: NONE	CAD FILE: FOA-015.SLDDRW
			SHEET 1 OF 1	