
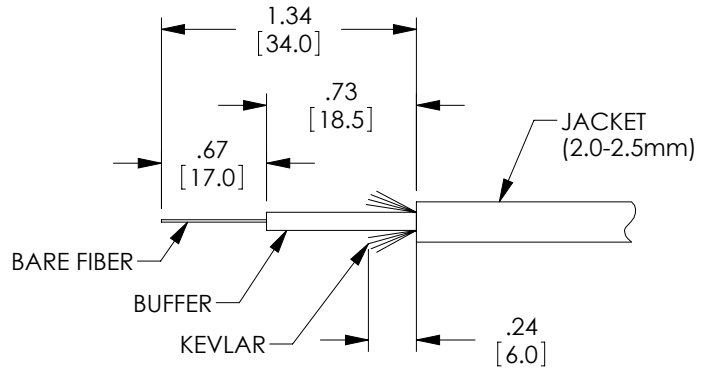
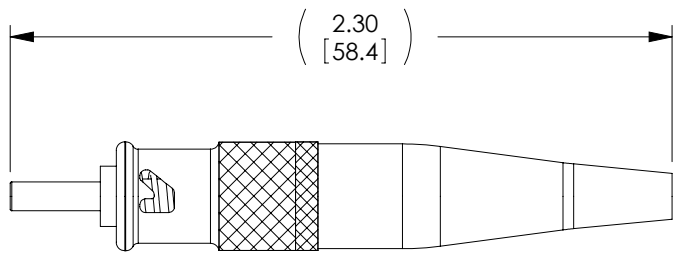


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/6/12	D.GRIFFIN

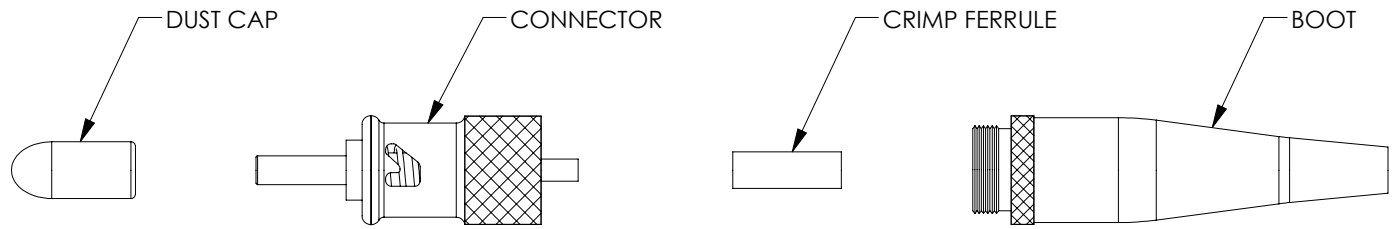

RECOMMENDED STRIPPING DIMENSIONS

- NOTES:
- MATERIAL: STAINLESS STEEL.
 - CONNECTOR ASSEMBLY POLISH TYPE: PC.
 - MODEL IS NON-LOCKING STYLE, SINGLE MODE.
 - STRIP FIBER CABLE TO MIL-STD-2042-5B. STRIP DIMENSIONS ARE +/- 1mm.
 - DUST CAP IS INSTALLED FOR SHIPMENT.
 - COMPONENTS COME UNASSEMBLED AND SHALL BE INDIVIDUALLY PACKAGED IN A POLY BAG.

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS D.FRISIELLO	DATE 3/9/12		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY D.GUITADAURO	DATE 3/9/12		CATEGORY FIBER OPTICS
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION MIL ST SM NON-LOCK SST 2MM	SCALE: NONE	CAD FILE: FOC-M83522-DNYS.SLDDRW
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. FOC-M83522-DNYS	REV. A
			SHEET 1 OF 1	