
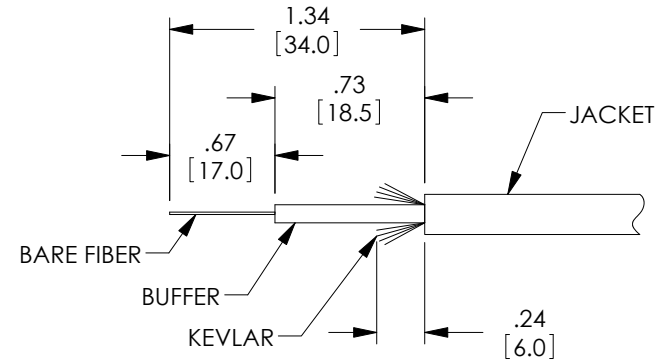
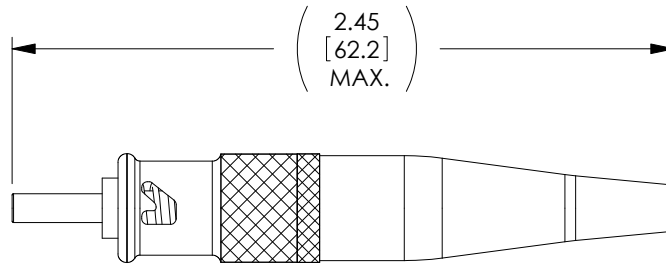


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	4/5/12	D.GRIFFIN
B	ECN 8626: ADDED O-RING, FERRULE AND SPACER WASHER	2/2/17	D.FRISIELLO
C	ECN 8941: ADDED NOTE TO O-RING AND FERRULE	9/26/17	D.FRISIELLO

MODEL NUMBER	USED WITH
FOC-RSTMMN1	1.9 - 2.0mm
FOC-RSTMMN2	2.0 - 2.5mm
FOC-RSTMMN3 *	2.5 - 3.0mm

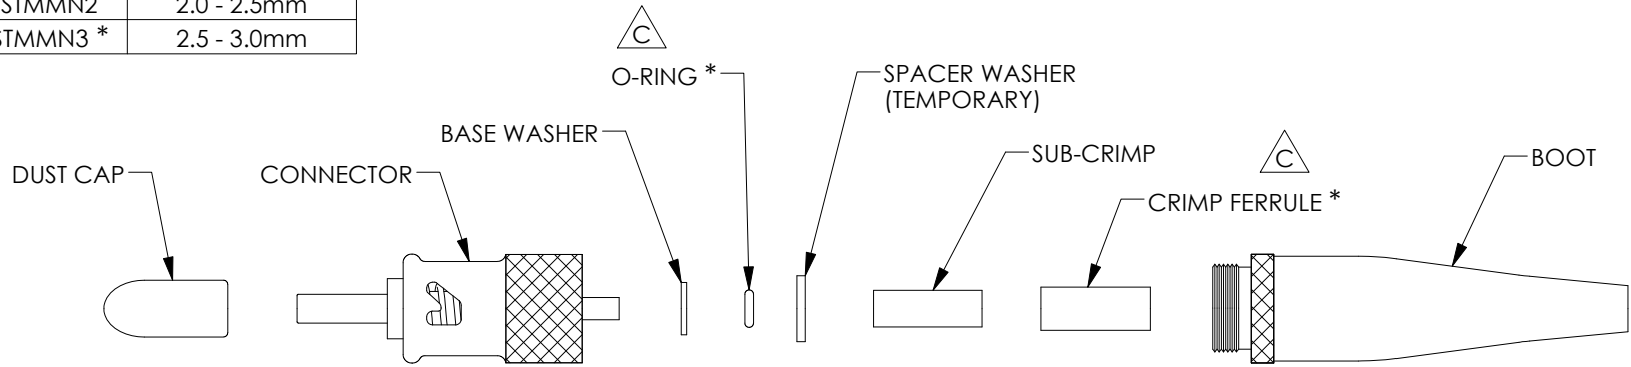

RECOMMENDED STRIPPING DIMENSIONS

NOTES:

MATERIAL: NICKEL PLATED BRASS.

CONNECTOR ASSEMBLY POLISH TYPE: PC.

MODEL IS NON-LOCKING STYLE, MULTIMODE.

STRIP FIBER CABLE TO MIL-STD-2042-5B. STRIP DIMENSIONS ARE +/- 1mm.

DUST CAP IS INSTALLED FOR SHIPMENT.

C "*" DENOTES O-RING AND CRIMP FERRULE ONLY PRESENT ON FOC-RSTMMN3.

COMPONENTS COME UNASSEMBLED AND SHALL BE INDIVIDUALLY PACKAGED IN A POLY BAG.

REGULATORY COMPLIANCE:
CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: $\le 12 [305] = +1 [25] / -0$ $>12 [305] \le 60 [1524] = +2 [51] / -0$ $>60 [1524] \le 120 [3048] = +4 [102] / -0$ $>120 [3048] \le 300 [7620] = +6 [152] / -0$ $>300 [7620] = +5\% / -0\%$	APPROVALS	DATE	 50 HIGH STREET NORTH ANDOVER, MA 01845	
	DRAWN BY D.FRISIELLO	3/2/12		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [5.1] .XXX = ± .005 [1.3]	CHECKED BY D.GUITADAURO	3/2/12	PRODUCT DESCRIPTION ST RGD MM NON-LOCK NPB	
PROJECTION 	APPROVED BY D.GALLAGHER	3/2/12		
	SIZE A	FSCM NO. 43321	DWG. NO. FOC-RSTMMN	REV. C
	SCALE: NONE		CAD FILE: FOC-RSTMMN.SLDDRW	
				SHEET 1 OF 1