
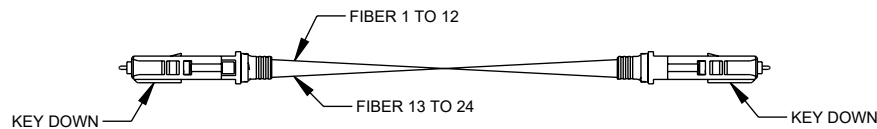
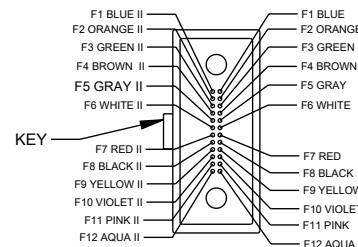

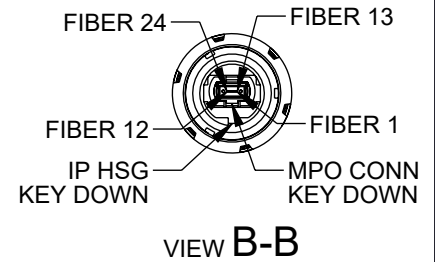
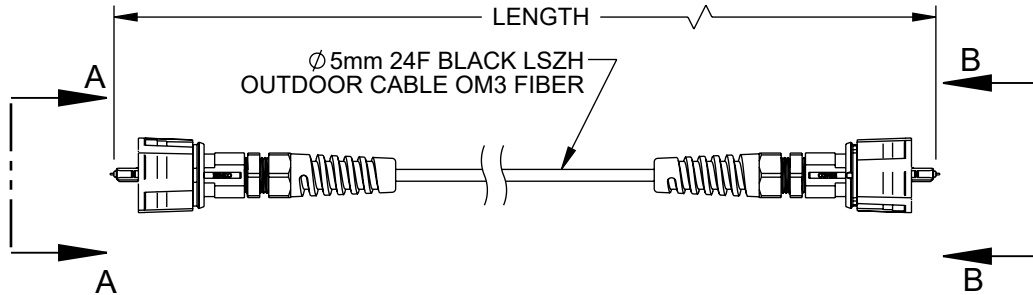


6		5		4		3		2		1	
LENGTH				OPTICAL SPECIFICATION				REVISION			
LENGTH (L) METER [FEET]		TOLERANCE MM [INCHES]		FIBER TYPE		MULTIMODE		ZONE		REV	
5 [16.40]		+50/-0 [+1.97/0]		CONNECTOR TYPE		IP-MPO/UPC		B		B	
10 [32.81]		+100/-0 [+3.94/0]		INSERTION LOSS		≤ 0.75dB		DESCRIPTION		DATE	
20 [65.62]		+1%*L/-0		RETURN LOSS		≥ 25dB		ECO-13297		02/07/2024	
30 [98.43]		+1%*L/-0		TEST WAVE LENGTH		850 & 1300nm		CHANGED BY		APPROVED	
								DZINN		PHOSPODAR	

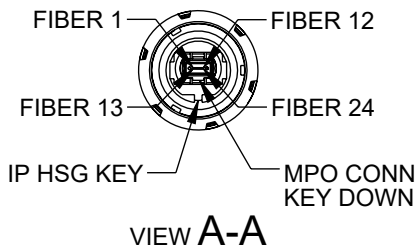

24 FIBER MPO POLARITY:
METHOD B, KEY DOWN-KEY DOWN

NOTES:

1. MPO CONNECTOR ASSEMBLY POLISH TYPE: UPC
2. MPO POLARITY: TIA METHOD B.
3. ALL CONNECTORS INCLUDE PROTECTIVE DUST CAPS.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IAW L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		 an INFINIT@ brand		 INTERPRET ALL DIMENSIONS AND TOLERANCES PER ASME Y14.5	
TOLERANCES:					
.X = ±.2 [5]	FRACTIONS ± 1/32	NONE	1 OF 1	DESCRIPTION IP68 OUTDOOR CABLE ASSY, 5MM OD OM3, MPO/UPC MALE 24F TO MPO/UPC MALE 24F, TYPE B	
.XX = ±.02 [0.5]	ANGLES ± 1°				
CABLE LENGTH TOLERANCES:		Website: www.L-com.com Phone: 1.800.341.5266 1.978.682.6936		SIZE	REV
≤12 [305] = +1 [25] / -0	>12 [305] ≤ 60 [1524] = +2 [51] / -0	A	B	CAGE CODE	
>60 [1524] ≤ 120 [3048] = +4 [102] / -0	>120 [3048] ≤ 300 [7620] = +6 [152] / -0	43321		DRAWN BY	
>300 [7620] = +5% / -0		DZINN		ITEM NO.	
ALL DIMENSIONS ARE FOR REFERENCE ONLY AND SUBJECT TO CHANGE WITHOUT NOTICE. UN-DIMENSIONED/NON-CRITICAL FEATURES MAY VARY IN SIZE AND LOCATION. COLORS MAY VARY		FOCM30DMPMB24			