


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/20/2021	PHOSPODAR

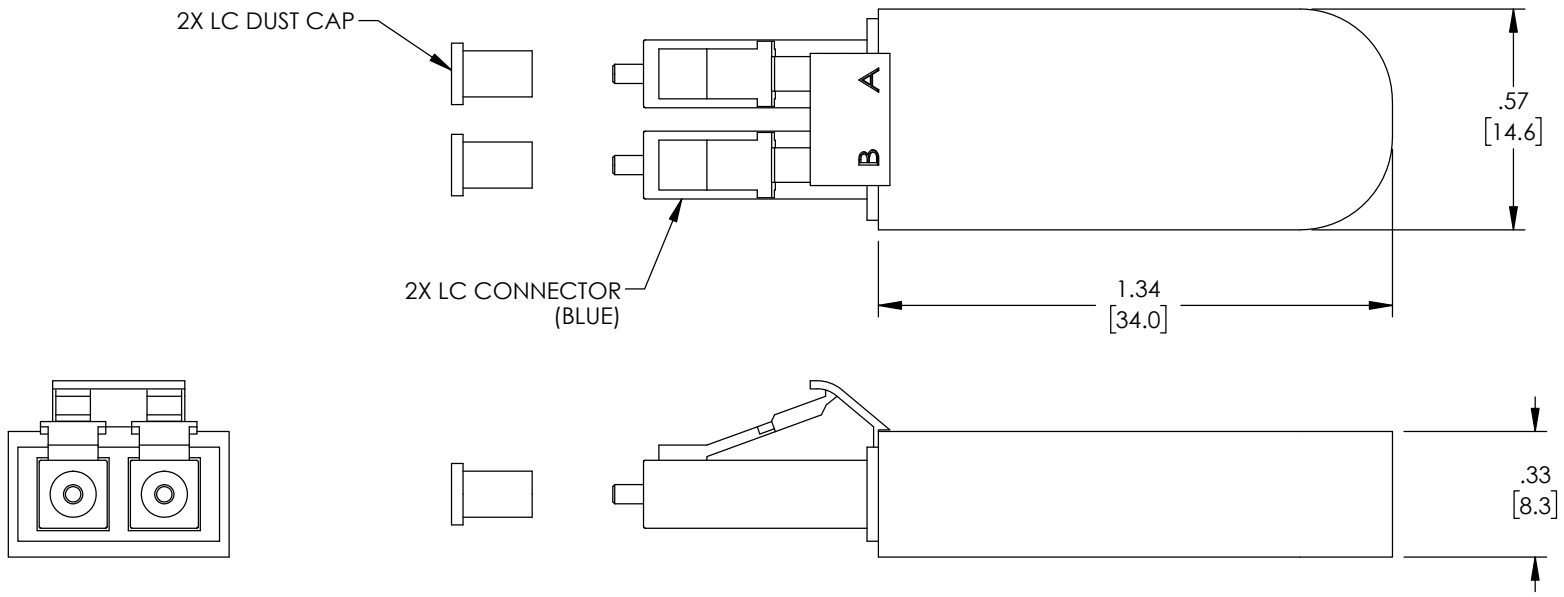

MODEL NUMBER	ATTENUATION
FOL-AT-LCUSM-01D	1dB
FOL-AT-LCUSM-02D	2dB
FOL-AT-LCUSM-03D	3dB
FOL-AT-LCUSM-05D	5dB
FOL-AT-LCUSM-07D	7dB
FOL-AT-LCUSM-10D	10dB
FOL-AT-LCUSM-12D	12dB
FOL-AT-LCUSM-15D	15dB
FOL-AT-LCUSM-20D	20dB



**SPECIFICATIONS:**

INSERTION LOSS:  $\leq 0.2\text{dB}$   
 RETURN LOSS:  $\geq 50\text{dB}$   
 TEST WAVELENGTH: 1310 nm

**NOTES:**

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. LC CONNECTOR ASSEMBLY POLISH TYPE: PC
3. ALL CONNECTORS ACCOMPANIED WITH A DUST CAP, INSTALLED.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY: DFRISIELLO CHECKED BY: PHOSPODAR APPROVED BY: PHOSPODAR	DATE 05/20/2021 05/20/2021 05/20/2021	 an INFINITO brand	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY FIBER OPTICS	PRODUCT DESCRIPTION Fiber Loopback LC Single Mode
SIZE <b>A</b>   CAGE CODE <b>43321</b>   ITEM NO. <b>FOL-AT-LCUSM</b>		REV. <b>A</b>		SHEET 1 OF 1