


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/5/12	D.FRISIELLO

HT302A / HT302B COAXIAL CABLE STRIPPER – 2 BLADES TYPE

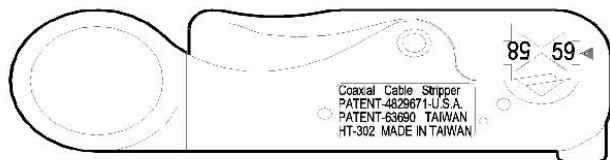

PAT. TAIWAN
USA

Coaxial Cable Stripper
PATENT-4829671-U.S.A.
PATENT-63690 TAIWAN
HT-302 MADE IN TAIWAN

HT	For stripping RG cable	Stripping distance
302A	RG-59/62/6/4C/5C	2 BLADES MODEL  D = 6, 8 mm
302B	RG-58/59/62/3C/4C	



Specification:

Length: 4.1" (150mm)

Weight: 40g

Material:

Body - made of ABS

Blade - made of SK-5

Replacement Blades : HT-3021

* Characteristic:

1. The V-block can be reversed, and the indication arrow "►" recommended the (RG) cable size.
2. Stripper distance can be changed if user moves one of the stripping blades.
3. Stripping the coaxial jacket and inner conductor in one operation and rotating the stripper in clockwise by 3-6 times, easy and effective.
4. For stripping different material of cable, use the built-in hex. Key to align the sensitive socket and adjust the blade for good result.

NOTES:

COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION LSP-010-1.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS DRAWN BY D.FRISIELLO	DATE 10/5/12	 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	CHECKED BY D.DESJARDIN	DATE 10/5/12	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	APPROVED BY D.FRISIELLO	PRODUCT DESCRIPTION STRIPPER TOOL RG58/59/62 2 CT
COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. HT302B
SCALE: NONE		CAD FILE: HT302B.SLDDRW	SHEET 1 OF 1