

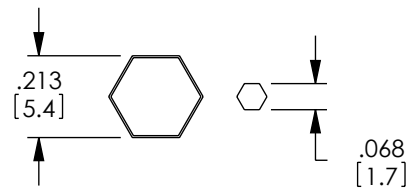
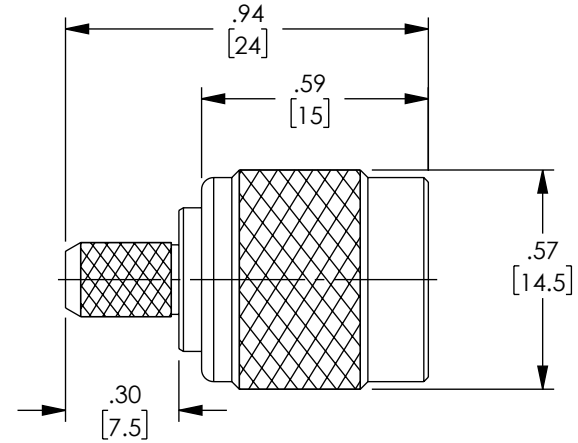



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	04/21/2023	WLI



RECOMMENDED
FERRULE & PIN
CRIMP SIZES

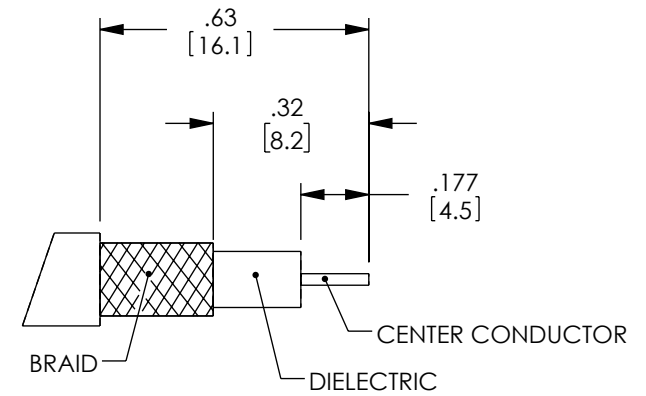

RECOMMENDED
CABLE STRIPPING
DIMENSIONS



NOTES:

MATERIAL:

BODY, SHELL AND FERRULE: BRASS; FINISH: NICKEL PLATE
 CENTER PIN: BRASS; FINISH: GOLD PLATE
 INSULATOR: PTFE
 GASKET: SILICONE RUBBER

MISCELLANEOUS:

IMPEDANCE: 50 OHMS.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY SLI	04/21/2023		
	CHECKED BY WLI	04/21/2023		
	APPROVED BY WLI	04/21/2023		
CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY COAXIAL		PRODUCT DESCRIPTION CON,TNC MALE CRIMP LMR195/RG58	
COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321		DWG. NO. LCCN3214
THIRD-ANGLE PROJECTION 	SCALE: NONE	CAD FILE: LCCN3214.SLDDRW		REV. A