


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/4/11	D.GRIFFIN
B	ECN 6146: REMOVE SOURCE REFERENCE	5/8/12	D.FRISIELLO

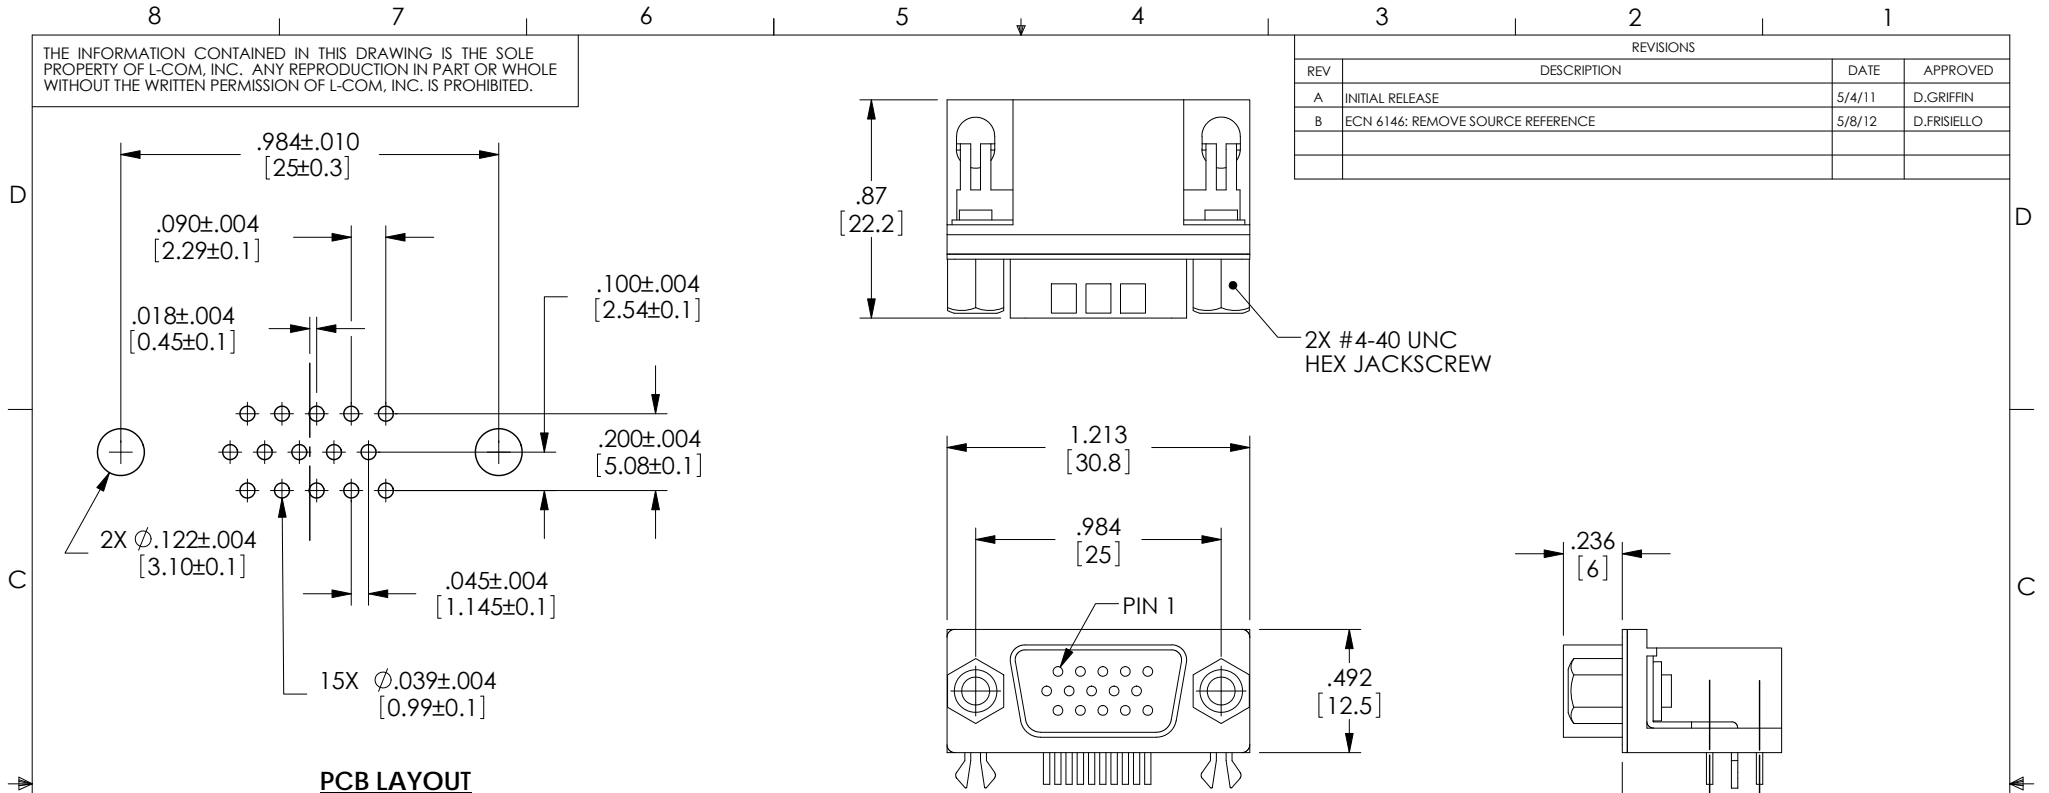

PCB LAYOUT

NOTES:

MATERIALS:

CONTACTS: BRASS
 SHELLS: COLD ROLLED STEEL
 INSULATOR: PBT, UL94V-0, BLACK
 JACKSCREWS: BRASS

FINISH:

CONTACT SURFACES: GOLD FLASH
 SHELL: NICKEL PLATED
 JACKSCREWS: NICKEL PLATED

ELECTRICAL:

DIELECTRIC WITHSTANDING VOLTAGE: AC 1000 V r.m.s.
 CONTACT CURRENT RATING: 1 AMPERE
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM AT DC 500V
 CONTACT RESISTANCE: 25 MILLIOHMS MAXIMUM

MISCELLANEOUS:

OPERATING TEMPERATURE: -55°C ~ 105°C
 ALL DIMENSIONS ARE FOR REFERENCE ONLY
 CONNECTOR SHALL BE PACKAGED 10 CONNECTORS PER TRAY AND
 LABELED WITH STANDARD L-COM PRODUCT LABEL.

RoHS Compliant ✓



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS D. CASTRO CHECKED BY D. PARHAM APPROVED BY S. SMITH	DATE 4/4/11 4/7/11 5/2/11	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	CATEGORY DATA			PRODUCT DESCRIPTION CONNECTOR, HD15M 90DEG PC		
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A		FSCM NO. 43321	DWG. NO. SDH15P-RA-PC
	PROJECTION 	1AC06-019	SCALE: NONE	CAD FILE: SDH15P-RA-PC.SLDDRW	SHEET 1 OF 1	