


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/30/2019	GUTTADAURO

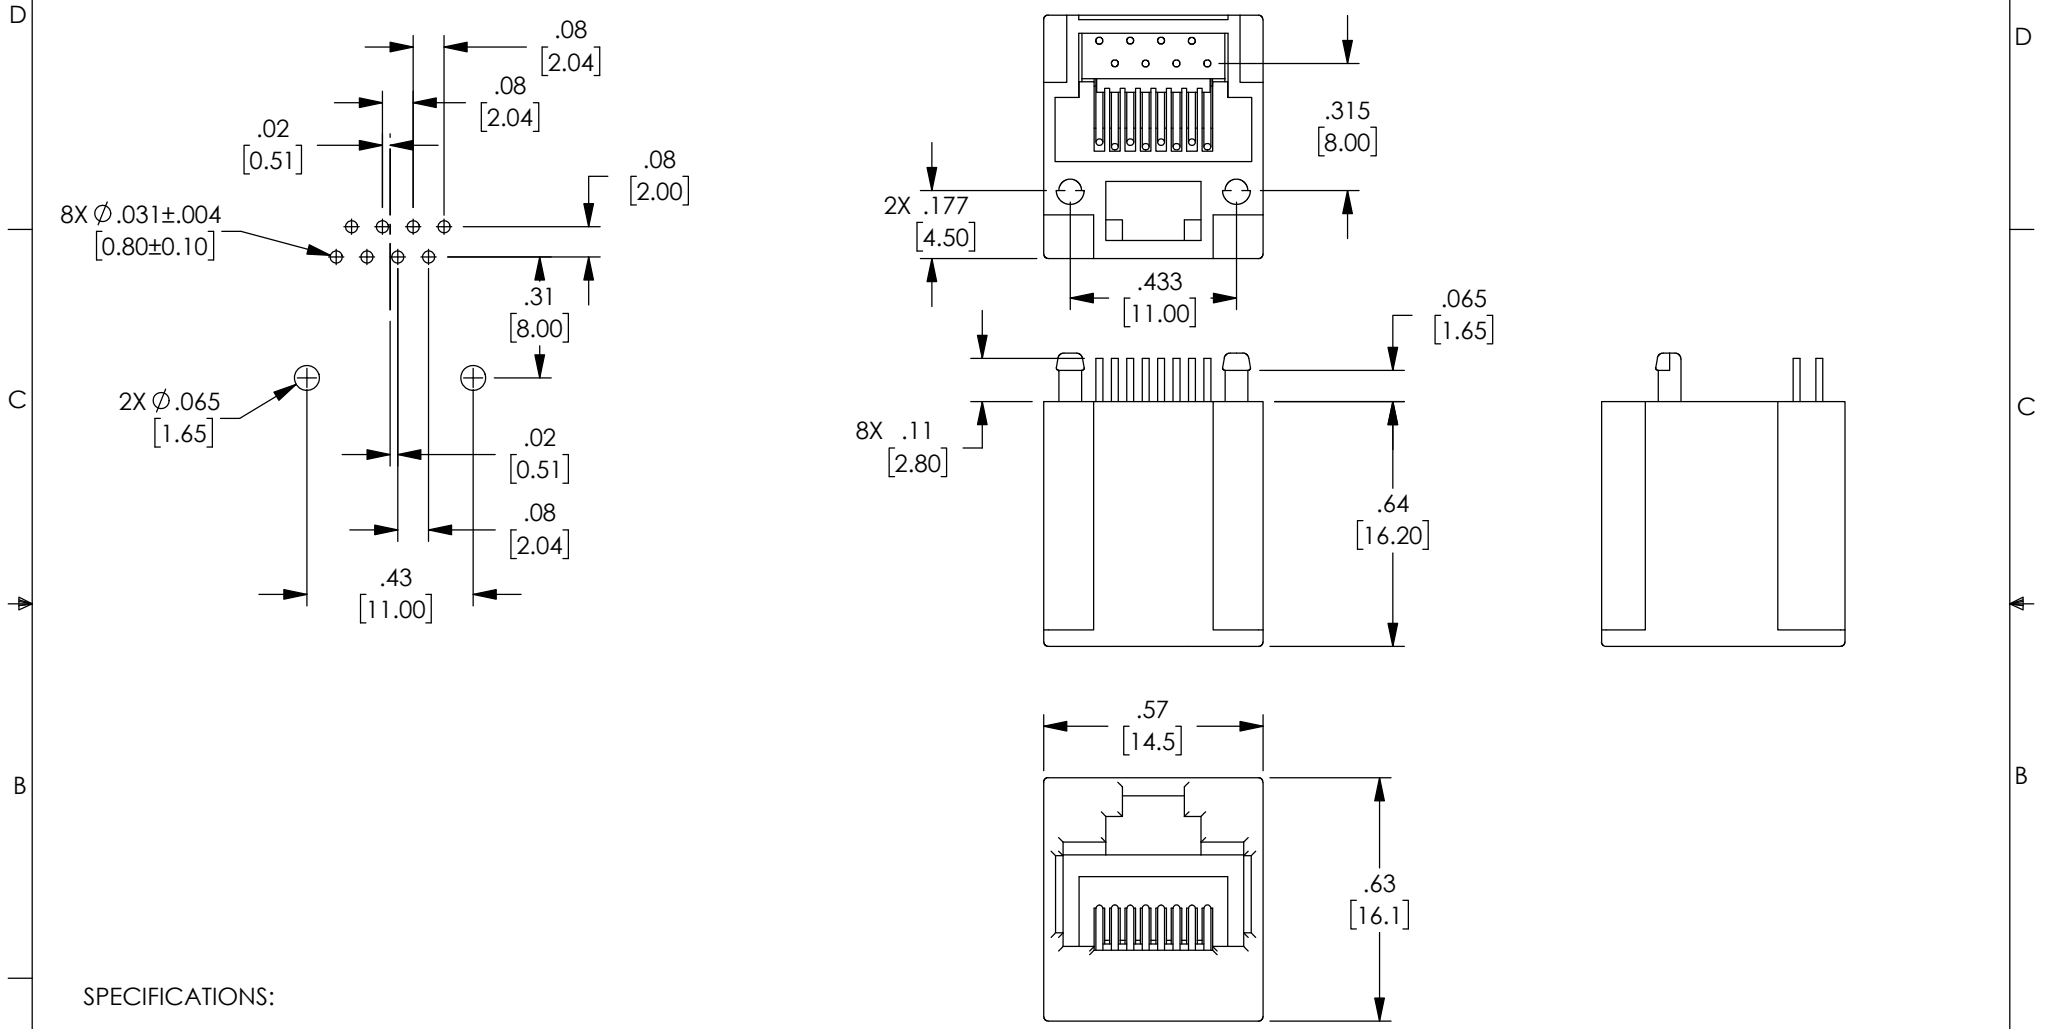

SPECIFICATIONS:

HOUSING: GLASS FILLED PBT, UL 94V-0, BLACK
 CONTACTS: Ø0.46mm [.018"] PHOSPHOR BRONZE,
 15 µ INCHES GOLD OVER NICKEL PLATING.

- NOTES:
1. RATED FOR CATEGORY 5E APPLICATIONS.
 2. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
 3. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	DRAWN BY DFRISIELLO	12/30/2019		
	CHECKED BY GUTTADAURO	12/30/2019	CATEGORY	TELECOM/MODULAR
	APPROVED BY GUTTADAURO	12/30/2019	PRODUCT DESCRIPTION	C5e Surface Mount Jack PCB 180°, 15um Black
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A CAGE CODE 43321 DWG. NO. SMJ-RJ45180-C5E REV. A SCALE: NONE CAD FILE: SMJ-RJ45180-C5E.SLDDRW SHEET 1 OF 1	