


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	DRAWING REPLACES TDC48R-OD1 AT REV A	11/13/14	D.CASTRO
B	ECN 9061:UPD NOTES&DWG FORMAT ,HOUSING MULTIPLE DIMENSIONAL CHANGES,ADD LOGO,COLOR CHANGE TO IVORY.	01/26/18	D.CUI

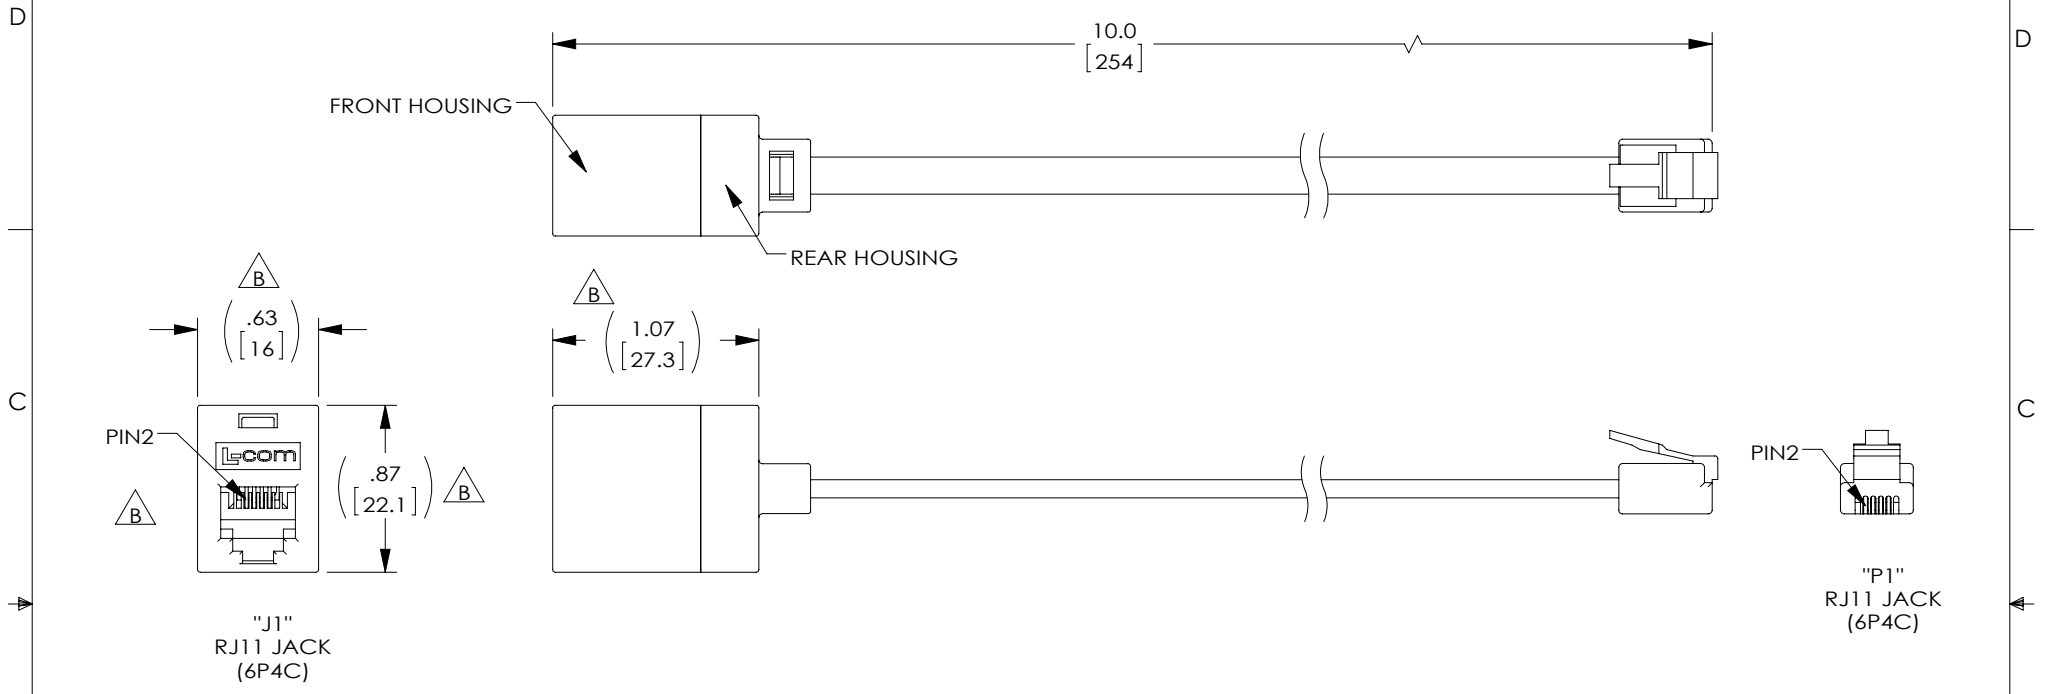

NOTES:

MATERIAL:

PLUG HOUSING:POLYCARBONATE,CLEAR,UL94V-0
 JACK HOUSING,FRONT:ABS,IVORY,PANTONE 7501C
 JACK HOUSING,REAR:ABS,IVORY,PANTONE 7501C
 CONTACTS:PHOSPHOR BRONZE
 CABLE JACKET:PVC,BEIGE

FINISH:

CONTACTS:GOLD PLATING IN CONTACT AREA
 OVER NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:

4 CONDUCTOR FLAT MODULAR CORD,
 U.L. STYLE 20251,26 AWG STRANDED

MISCELLANEOUS:

EXTENSION CABLES TO BE TESTED FOR CONTINUITY
 EXTENSION CABLES TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:

CE2011/65/EU(RoHS DIRECTIVE)

WIRING MAP	
"J1"	"P1"
2	5
3	4
4	3
5	2

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [5.1] .XXX = ±.005 [1.3]	APPROVALS TJC CHECKED BY DFP APPROVED BY CM	DATE 12/19/01 12/19/01 12/19/01	L-com® Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		CATEGORY TELECOM/MODULAR	
	COLOR VARIATIONS MAY OCCUR		PRODUCT DESCRIPTION REVERSE ADPTR CBL RJ11 M/F	
	PROJECTION 	REF	SIZE A	FSCM NO. 43321