



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/21/16	D.FRISIELLO
B	ECN 8696: REMOVE CABLE IEC RATINGS	03/28/17	S.LI

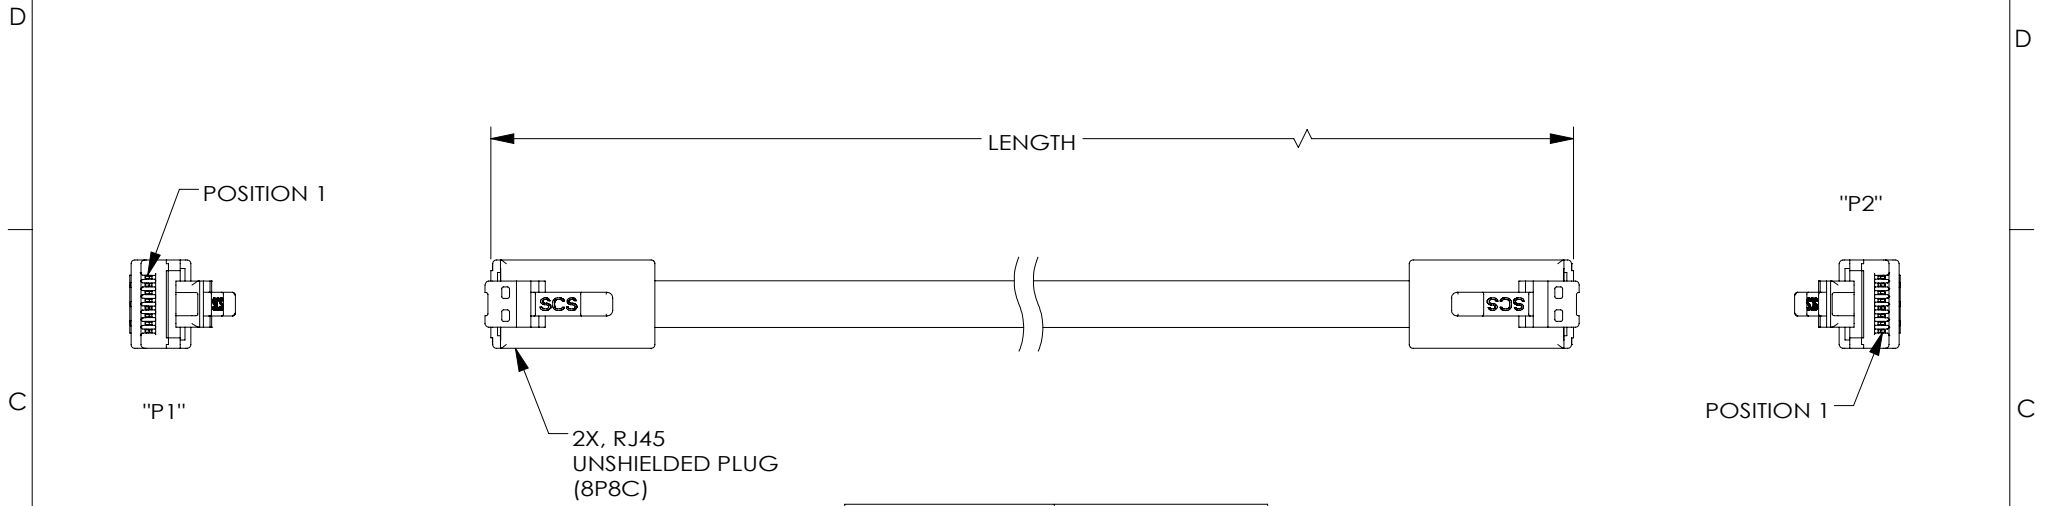

MODEL NUMBER	LENGTH	
	FEET	METERS
TRD695LZBL-1	1.0	.30
TRD695LZBL-2	2.0	.61
TRD695LZBL-3	3.0	.91
TRD695LZBL-5	5.0	1.52
TRD695LZBL-7	7.0	2.13
TRD695LZBL-10	10.0	3.05
TRD695LZBL-15	15.0	4.57
TRD695LZBL-25	25.0	7.62
TRD695LZBL-30	30.0	9.14
TRD695LZBL-50	50.0	15.24
TRD695LZBL-75	75.0	22.86
TRD695LZBL-100	100.0	30.48

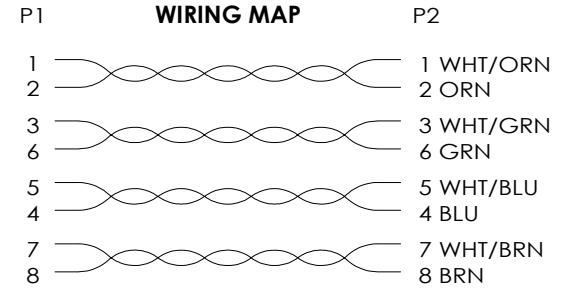

NOTES:

MATERIAL:
 PLUG HOUSING: POLYCARBONATE, CLEAR, UL94V-0
 CONTACTS: PHOSPHOR BRONZE.

FINISH:
 CONTACTS: 50 μINCHES GOLD IN CONTACT AREA
 OVER 100 μINCHES NICKEL PLATE OVERALL.

CABLE CHARACTERISTICS:
 CAT 6, UNSHIELDED FOUR TWISTED PAIRS MODULAR CORD,
 23 AWG SOLID BARE COPPER CONDUCTORS
 OUTER JACKET: UL444, LOW SMOKE ZERO HALOGEN, BLUE

MISCELLANEOUS:
 LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
 OPERATING TEMPERATURE RANGE: -20°C TO +70°C.
 CABLE ASSEMBLY TO BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY TO BE INDIVIDUALLY PACKAGED IN
 ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		50 HIGH STREET NORTH ANDOVER, MA 01845		
	DRAWN BY D.FRISIELLO	10/3/16				
ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [1.51] .XXX = ± .005 [1.3]	CHECKED BY D.DESJARDIN	10/4/16	CATEGORY TELECOM/MODULAR			
	APPROVED BY D.GUITADAURO	10/21/16	PRODUCT DESCRIPTION RJ45 C6 UTP 23SLD LSZH BLU			
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TRD695LZBL	REV. B
			SCALE: NONE	CAD FILE: TRD695LZBL.SLDDRW	SHEET 1 OF 1	