
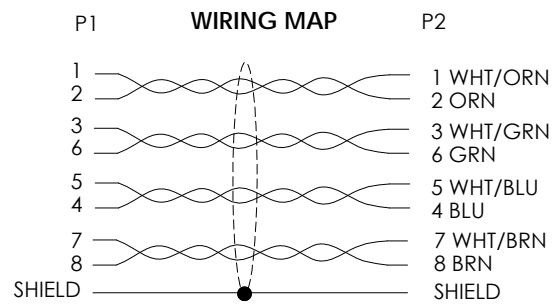


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	CN INITIAL RELEASE	01/09/2024	ZHANG	WLI

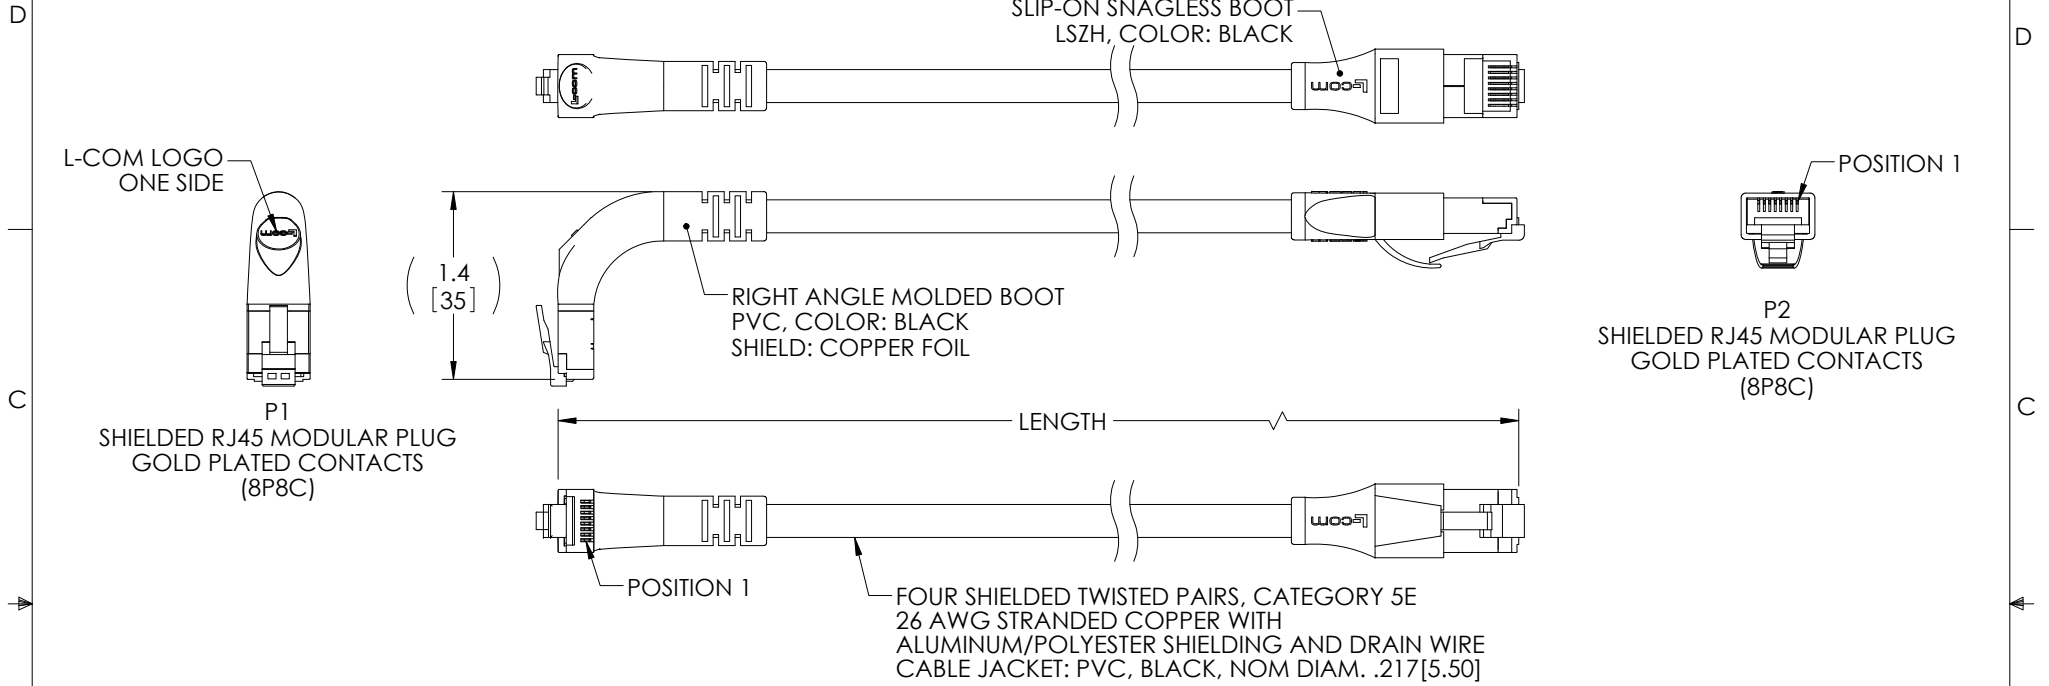

PART NUMBER	LENGTH METERS [FEET]
TRD815SRA2BLK-0.5M	0.5[1.64]
TRD815SRA2BLK-1M	1.0[3.28]
TRD815SRA2BLK-1.5M	1.5[4.92]
TRD815SRA2BLK-2M	2.0[6.56]
TRD815SRA2BLK-2.5M	2.5[8.20]
TRD815SRA2BLK-3M	3.0[9.84]
TRD815SRA2BLK-5M	5.0[16.40]
TRD815SRA2BLK-7M	7.0[22.97]
TRD815SRA2BLK-10M	10.0 [32.81]

**NOTES:**

1. PLUG CONFORMS TO TIA-1096
2. OPERATING TEMPERATURE RANGE: -10°C TO +75 °C
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS DRAWN BY BZHANG CHECKED BY WLI APPROVED BY WLI	DATE 01/05/2024 01/05/2024 01/05/2024	50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936 CATEGORY <b>TELECOM/MODULAR</b> PRODUCT DESCRIPTION <b>C5E PVC FTP STR-UP BLK</b>	
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR		SIZE <b>A</b> CAGE CODE <b>43321</b> ITEM NO. TRD815SRA2BLK-xxM
	THIRD-ANGLE PROJECTION 	SCALE: NONE		CAD FILE: TRD815SRA2BLK-xxM.SLDDRW
	SHEET 1 OF 1			