
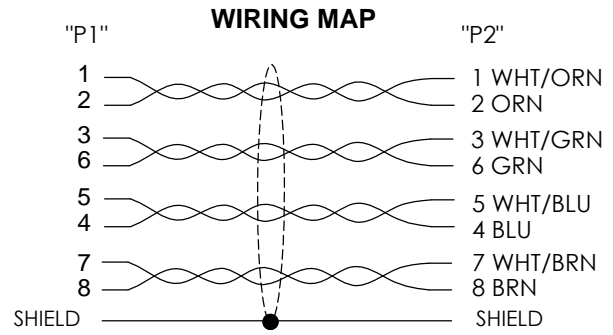


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/27/16	D.GRIFFIN

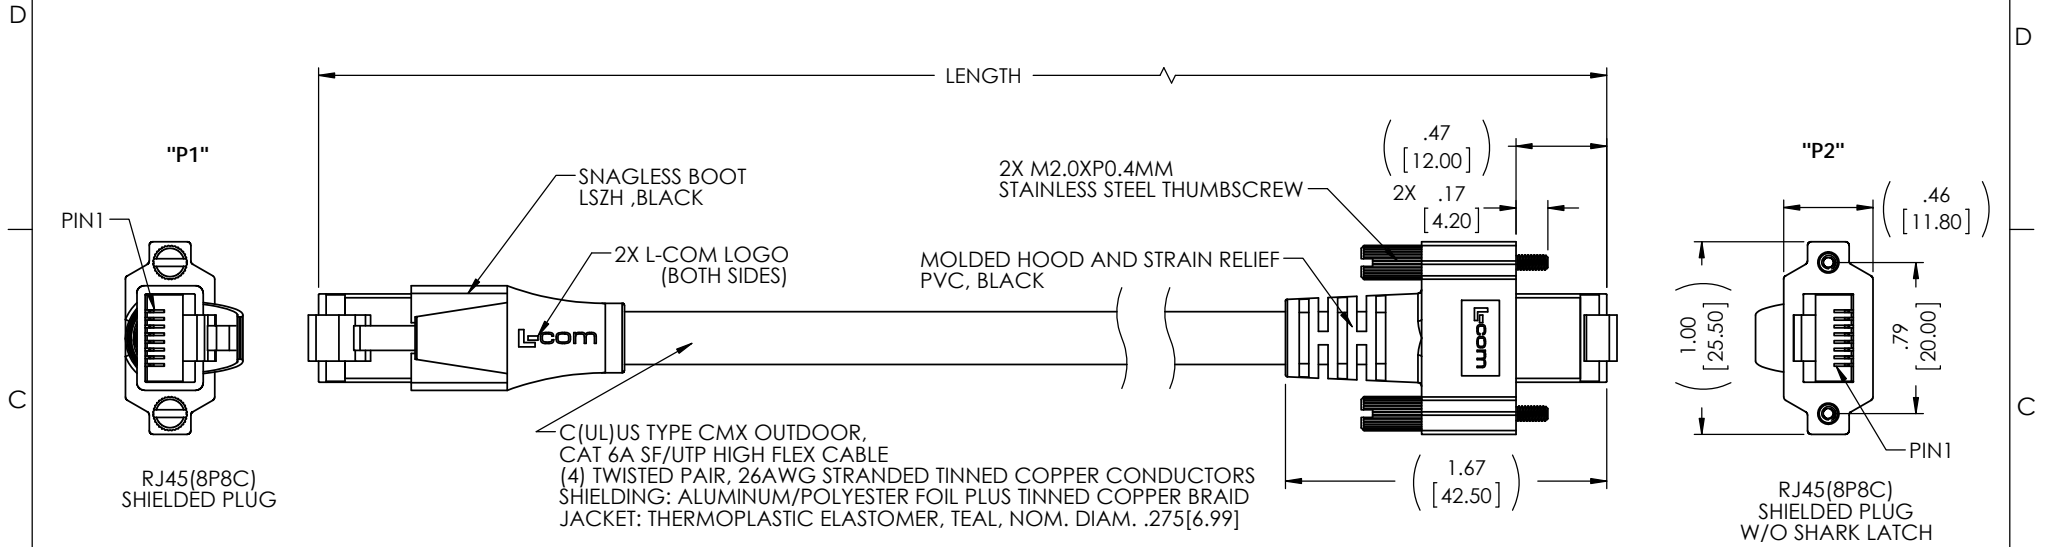

PART NUMBER	LENGTH	
	FEET	METERS
TRG617-T6T-1M	3.28	1.0
TRG617-T6T-2M	6.56	2.0
TRG617-T6T-3M	9.84	3.0
TRG617-T6T-5M	16.41	5.0
TRG617-T6T-10M	32.82	10.0

NOTES
MATERIAL:
 RJ45 HOUSING: POLYCARBONATE, CLEAR UL96V-0
 RJ45 SHIELD/STRAIN RELIEF: BRASS,NICKEL PLATE
 RJ45 CONTACTS: PHOSPHOR BRONZE , 50µ" MIN. GOLD PLATE IN CONTACT AREA , NICKEL PLATE OVERALL

ELECTRICAL:
 NOMINAL VOLTAGE RATING: 125 V AC
 MAX CURRENT: 1.5A

ENVIRONMENTAL:
 OPERATING TEMPERATURE RANGE: -10°C TO +60°C

MISCELLANEOUS
 CABLE ASSEMBLIES TO BE TESTED FOR CONTINUITY
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

REGULATORY COMPLIANCE:
 CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5.08] .XX = ± .02 [.51] .XXX = ±.005 [.13]	APPROVALS	DATE
	DRAWN BY D.CUI	04/26/16
	CHECKED BY B.ZHANG	04/26/16
	APPROVED BY S.PAN	04/26/16
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR

L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845

CATEGORY: TELECOM/MODULAR

PRODUCT DESCRIPTION: GigE-RJ45 TPE 26 TEL

SIZE: A	FSCM NO.: 43321	DWG. NO.: TRG617-T6T	REV.: A
SCALE: NONE	CAD FILE: TRG617-T6T.SLDDRW	SHEET 1 OF 1	