



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/14/2020	GUTTADAURO



"P1"  
IP67 RJ45 PLUG  
CAT 6A SHIELDED KIT

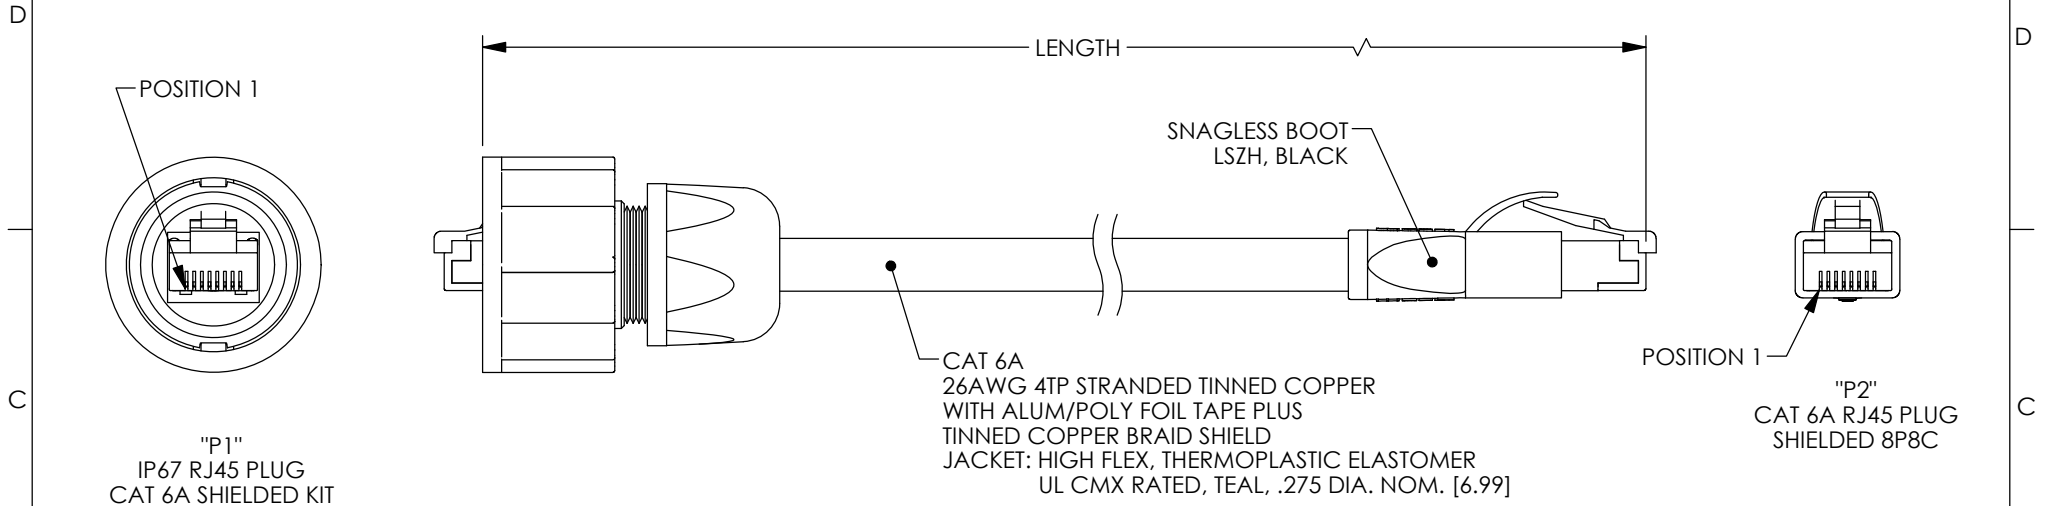

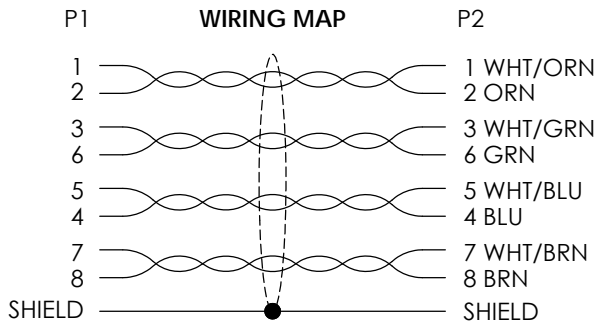"P2"  
CAT 6A RJ45 PLUG  
SHIELDED 8P8C



MODEL NUMBER	LENGTH METERS [FEET]
TRG695AHF1-05M	0.5 [1.64]
TRG695AHF1-1M	1.0 [3.28]
TRG695AHF1-2M	2.0 [6.56]
TRG695AHF1-3M	3.0 [9.84]
TRG695AHF1-5M	5.0 [16.41]
TRG695AHF1-10M	10.0 [32.81]

**NOTES:**

- OIL AND UV RESISTANT CABLE IS SUITABLE FOR OUTDOOR OR INDUSTRIAL APPLICATIONS.
- "P1" IS IP-67 RATED WHEN MATED SECURELY.
- CONNECTOR TEMPERATURE RATING: -40 °C TO +68 °C  
CABLE TEMPERATURE RATING: -40 °C TO +75 °C
- LENGTHS OVER 10 METERS (32.8 FT) ARE CHANNEL RATED.
- PLUG CONFORMS TO TIA-1096.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM PACKAGING SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DFRISIELLO	01/13/2020	
	APPROVED BY GUTTADAURO	01/14/2020	CATEGORY <b>TELECOM/MODULAR</b>
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION <b>IP67RJ45/RJ45 C6A SF/UTP TPE TEL HFX</b>
	SIZE <b>A</b>	CAGE CODE <b>43321</b>	ITEM NO. <b>TRG695AHF1</b>
	SCALE: NONE	CAD FILE: TRG695AHF1.SLDDRW	REV. <b>A</b>