



REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	C	ECO-13924	10/10/2024	KDANG	DUSTING

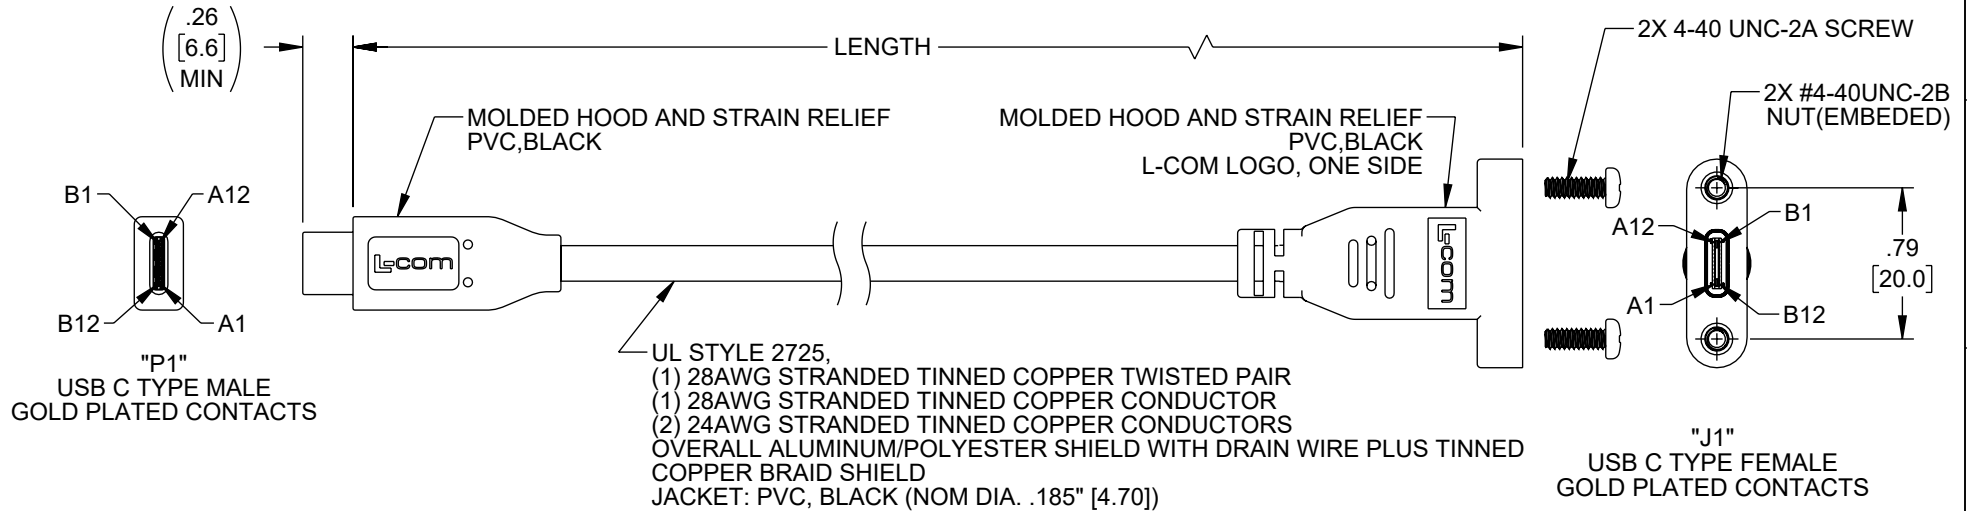

UL STYLE 2725,  
 (1) 28AWG STRANDED TINNED COPPER TWISTED PAIR  
 (1) 28AWG STRANDED TINNED COPPER CONDUCTOR  
 (2) 24AWG STRANDED TINNED COPPER CONDUCTORS  
 OVERALL ALUMINUM/POLYESTER SHIELD WITH DRAIN WIRE PLUS TINNED  
 COPPER BRAID SHIELD  
 JACKET: PVC, BLACK (NOM DIA. .185" [4.70])

**WIRING DIAGRAM**

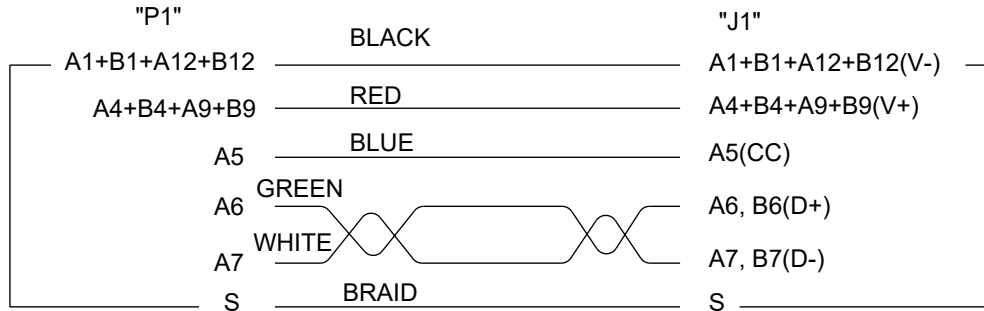

MODEL NUMBER	LENGTH		
	METERS	FEET	TOL. (IN)
U3A00056-03M	0.3	0.98	+/- 1.18
U3A00056-05M	0.5	1.64	+/- 1.18
U3A00056-1M	1.0	3.28	+/- 1.18
U3A00056-2M	2.0	6.56	+/- 1.97
U3A00056-3M	3.0	9.84	+/- 1.97

**NOTES**

- ELECTRICAL:**  
 VOLTAGE TEST: DC 300V 10ms  
 INSULATION RESISTANCE: 10.0M Ω, MIN  
 CONDUCTANCE RESISTANCE: 5.0 Ω, MAX.
- MOUNTING HARDWARE INCLUDED: 2X #4-40 SCREW
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION LSP-010.

**REGULATORY COMPLIANCE:**  
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED. THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED  
 LEADING DIMENSIONS ARE INCHES  
 DIMENSIONS IN [ ] ARE MILLIMETERS


**TOLERANCES:**

X = ±.2 [5]	FRACTIONS
.XX = ±.02 [0.5]	± 1/32
.XXX = ±.005 [0.13]	ANGLES ± 1°

**CABLE LENGTH TOLERANCES:**

≤12 [305]	= +1 [25] / -0
>12 [305] ≤ 60 [1524]	= +2 [51] / -0
>60 [1524] ≤ 120 [3048]	= +4 [102] / -0
>120 [3048] ≤ 300 [7620]	= +6 [152] / -0
>300 [7620]	= +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY  
 AND SUBJECT TO CHANGE WITHOUT NOTICE.  
 UN-DIMENSIONED/NON-CRITICAL FEATURES  
 MAY VARY IN SIZE AND LOCATION  
 COLORS MAY VARY



**an INFINIT@ brand**

Website: www.L-com.com  
 Phone: 1.800.341.5266 | 1.978.682.6936



INTERPRET ALL DIMENSIONS AND  
 TOLERANCES PER ASME Y14.5

SCALE	SHEET
NONE	1 OF 1

DESCRIPTION

CA USB-C PNL/USB-CM

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	43321	JYOU	U3A00056	C