

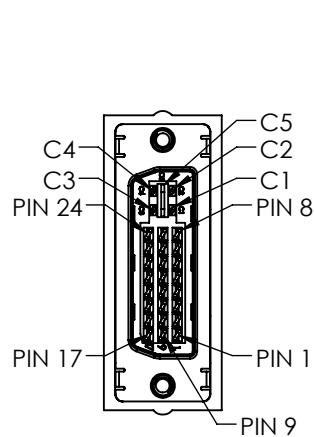


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/03/17	J.YOU
B	ECN 9988: 23.0mm WAS 26.4mm, 18.27mm WAS 27mm; UPDATE DRAWING FORMAT	09/19/2019	B.GATES

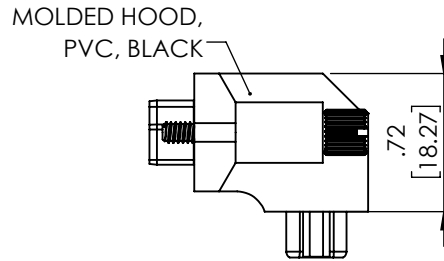

**P1**  
MALE DVI-I  
DUAL LINK CONNECTOR  
BLACK INSULATION  
GOLD FLASH SHELL&PINS

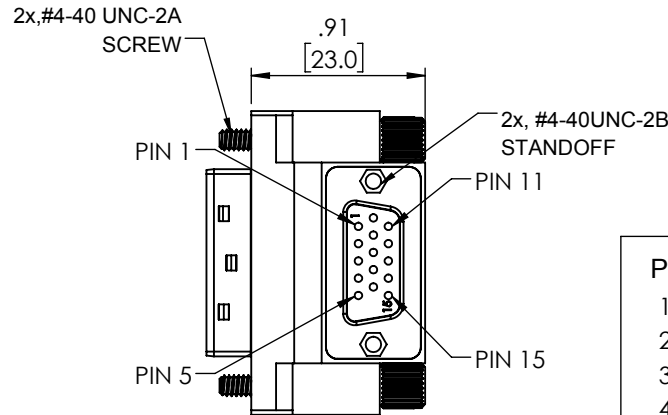

**P2**  
MALE 15-PIN  
HIGH DENSITY  
D-SUB CONNECTOR  
BLUE INSULATION  
GOLD FLASH SHELL&PINS

**PIN OUT**

P1	P2	P1	P2
1	1	16	16
2	2	17	17
3	3	18	18
4	4	19	19
5	5	20	20
6	6	21	21
7	7	22	22
8	8	23	23
9	9	24	24
10	10	C1	C1
11	11	C2	C2
12	12	C3	C3
13	13	C4	C4
14	14	C5	C5
15	15	S	S

**NOTES**

- 1.VISUAL:**The ADAPTER SHOULD BE CLEAN, FREE OF OILED/FLASH/BURRED.
- 2.ADAPTER SHALL BE 100% TESTED FOR CONTINUITY.**  
DIELECTRIC VOLTAGE: DC 300V FOR 10MS  
INSULATION RESISTANCE: 5.0M ohm MIN.  
CONDUCTOR RESISTANCE: 5.0 ohm MAX.
- 3.ADAPTER TO BE INDIVIDUALLY PACKAGED IN A CLEAR POLYBAG**

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm]  OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%  ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [51] .XXX = ±.005 [13]	APPROVALS DRAWN BY <b>J.YOU</b>	DATE 07/03/17		50 HIGH STREET NORTH ANDOVER, MA 01845	
	CHECKED BY <b>B.GATES</b>	07/03/17		CATEGORY <b>AUDIO/VIDEO</b>	
	APPROVED BY <b>B.GATES</b>	07/03/17	PRODUCT DESCRIPTION <b>DVI 24+5 M TO VGA F ADPTR</b>		
	PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY  COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. <b>VIC00003</b>

SCALE: NONE | CAD FILE: VIC00003.SLDDRW | SHEET 1 OF 1