



Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

Active Optical Cables Technical Data Sheet

AOCSP10-005

Features

- Up to 11.1Gbps Data rate
- Maximum link length of 100m
- High Reliability 850nm VCSEL technology
- Electrically hot-pluggable
- Electrical interface compliant to SFF-8431
- Case operating temperature range: 0°C to 70°C
- Power dissipation < 1.0W per cable end

Applications

- 10G Ethernet Data center Intra-Rack and Inter-Rack links

Description

The AOCSP10-005 is an active optical cable designed for use in 10 Gigabit Ethernet links. They are electrically compliant with SFF-8431 and mechanically compliant with SFF-8432. The AOCSP10-005 allows for greater link length than direct attach cables with a lower total cost and lower power consumption than transceiver-based solutions.

SFP+ Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	Ts	-40	-	85	°C	
Relative Humidity	RH	5	-	95	%	
Power Supply Voltage	VCC	-0.3	-	4	V	
Signal Input Voltage		Vcc-0.3	-	Vcc+0.3	V	

SFP+ Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	Tcase	0	-	70	°C	Without air flow
Power Supply Voltage	VCC	3.14	3.3	3.46	V	
Power Supply Current	ICC	-		300	mA	per cable end
Data Rate	BR		10.3125		Gbps	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible AOCSP10-005](#)



Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

Active Optical Cables Technical Data Sheet

AOCSP10-005

SFP+ General Product Characteristics

Parameter	Value	Unit	Notes
Module Form Factor	SFP+		
Maximum Data Rate	11.1	Gb/s	
Standard Cable Lengths	3, 5, 7, 10, 50, 100	meters	Other lengths may be available upon request (<= 300m)
Protocols Supported	Typical applications include Infiniband, Fibre Channel, 10G Ethernet		
Electrical Interface and Pin-out	20-pin edge connector		Pin-out as defined by the SFP+ MSA
Standard Optical Cable Type	Multimode ribbon fiber cable assembly		
Maximum Power Consumption per End	1.0	W	per cable end
Management Interface	Serial, I2C-based, 400 kHz maximum frequency		As defined by the SFP+ MSA

SFP+ Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	NOTE
Supply Voltage	VccT, VccR	3.14	3.3	3.46	V	
Supply Current	Icc			300	mA	
Transmitter						
Differential data input swing	V _{in,pp}	180		1000	mV	1
Single ended input voltage tolerance	V _{inT}	-0.3		4.0	V	
Receiver						
Differential data output swing	V _{out,pp}	300		850	mV	2
Single-ended output voltage		-0.3		4.0	V	

Notes:

1. AC coupled internally. Self-biasing 100Ω differential input.
2. AC coupled with 100Ω differential output impedance.

Mechanical Specifications

Length	196.85 in [500 cm]
Cable Color	Orange

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible AOCSP10-005](#)



an INFINIT® brand



Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

Active Optical Cables Technical Data Sheet

AOCSP10-005

Environmental Specifications

SFP+

Temperature (Operational)	+0C to +70C
Temperature (Storage)	-40C to +85C
Relative Humidity	5% to 95%

Compliance Certifications

RoHS Compliant Yes

All trademarks, service marks, registered marks, or registered service marks are the property of their respective owners, and do not imply any affiliation with L-com or Infinite Electronics

Our portfolio includes cable assemblies, connectors, adapters and custom products, as well as their wireless product line which includes antennas, RF amplifiers, coaxial lightning and surge protectors, and NEMA rated enclosures.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible AOCSP10-005](https://www.l-com.com/active-optical-cable-sfp-10gbps-5m-msa-compatible-aocsp10-005)

URL: <https://www.l-com.com/active-optical-cable-sfp-10gbps-5m-msa-compatible-aocsp10-005-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume any liability arising out of the use of any part or documentation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible AOCSP10-005](https://www.l-com.com/active-optical-cable-sfp-10gbps-5m-msa-compatible-aocsp10-005)



Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

SFP+ Pin Assignment

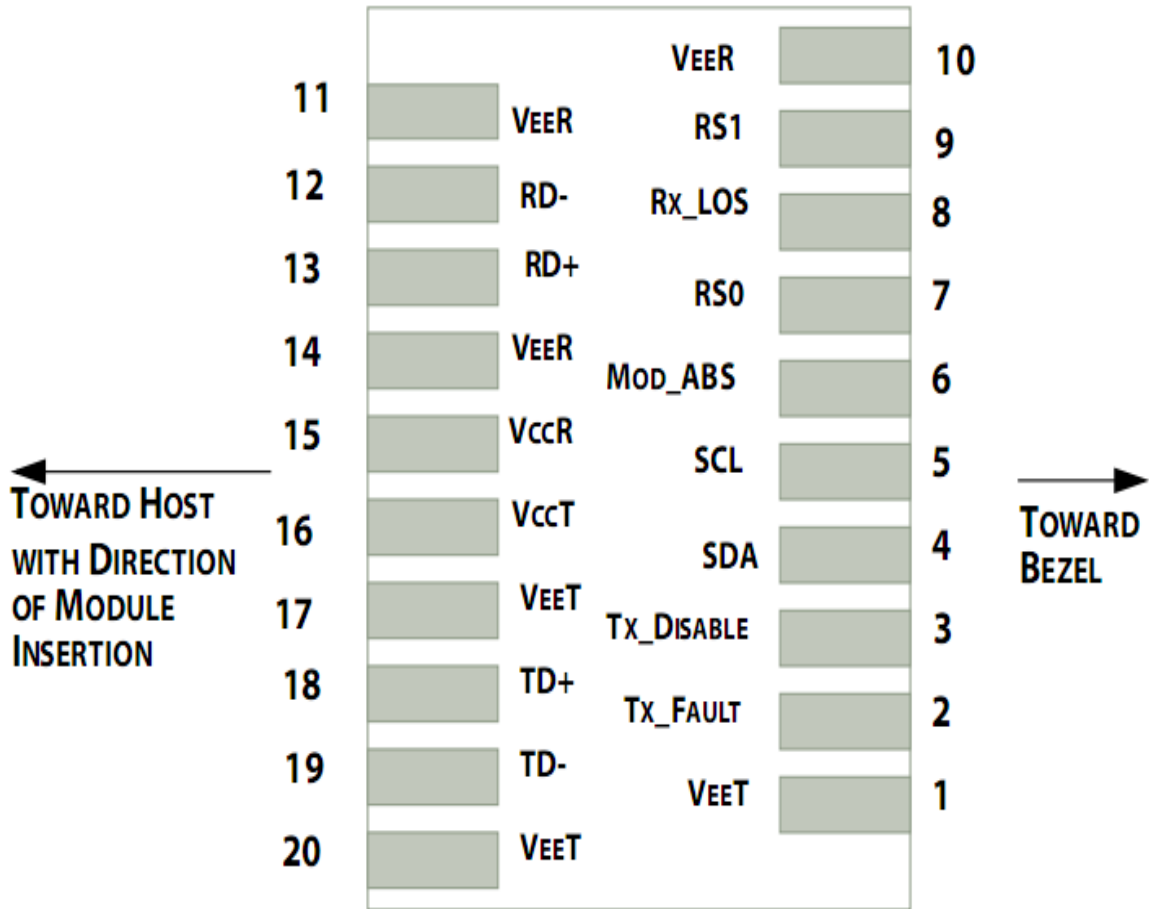

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible AOCSP10-005](#)



Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

Active Optical Cables Technical Data Sheet

AOCSP10-005

SFP+ Pin Assignment Table


Pin	Symbol	Name/Description	NOTE
1	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
2	T_{FAULT}	Transmitter Fault.	2
3	T_{DIS}	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate Select 0	5
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	6
9	RS1	No connection required	1
10	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	V_{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V_{CCR}	Receiver Power Supply	
16	V_{CCT}	Transmitter Power Supply	
17	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	V_{EET}	Transmitter Ground (Common with Receiver Ground)	1

Notes:

- Circuit ground is internally isolated from chassis ground.
- T_{FAULT} is an open collector/drain output, which should be pulled up with a 4.7k – 10k Ohms resistor on the host board if intended for use. Pull up voltage should be between 2.0V to $V_{CC} + 0.3V$. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
- Laser output disabled on $T_{DIS} > 2.0V$ or open, enabled on $T_{DIS} < 0.8V$.
- Should be pulled up with 4.7k Ω - 10k Ω host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
- Internally pulled down per SFF-8431 Rev 4.1.
- LOS is open collector output. It should be pulled up with 4.7k Ω – 10k Ω on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

AOCSP10-005 CAD Drawing

Active Optical Cable SFP+ 10Gbps, 5m, MSA Compatible

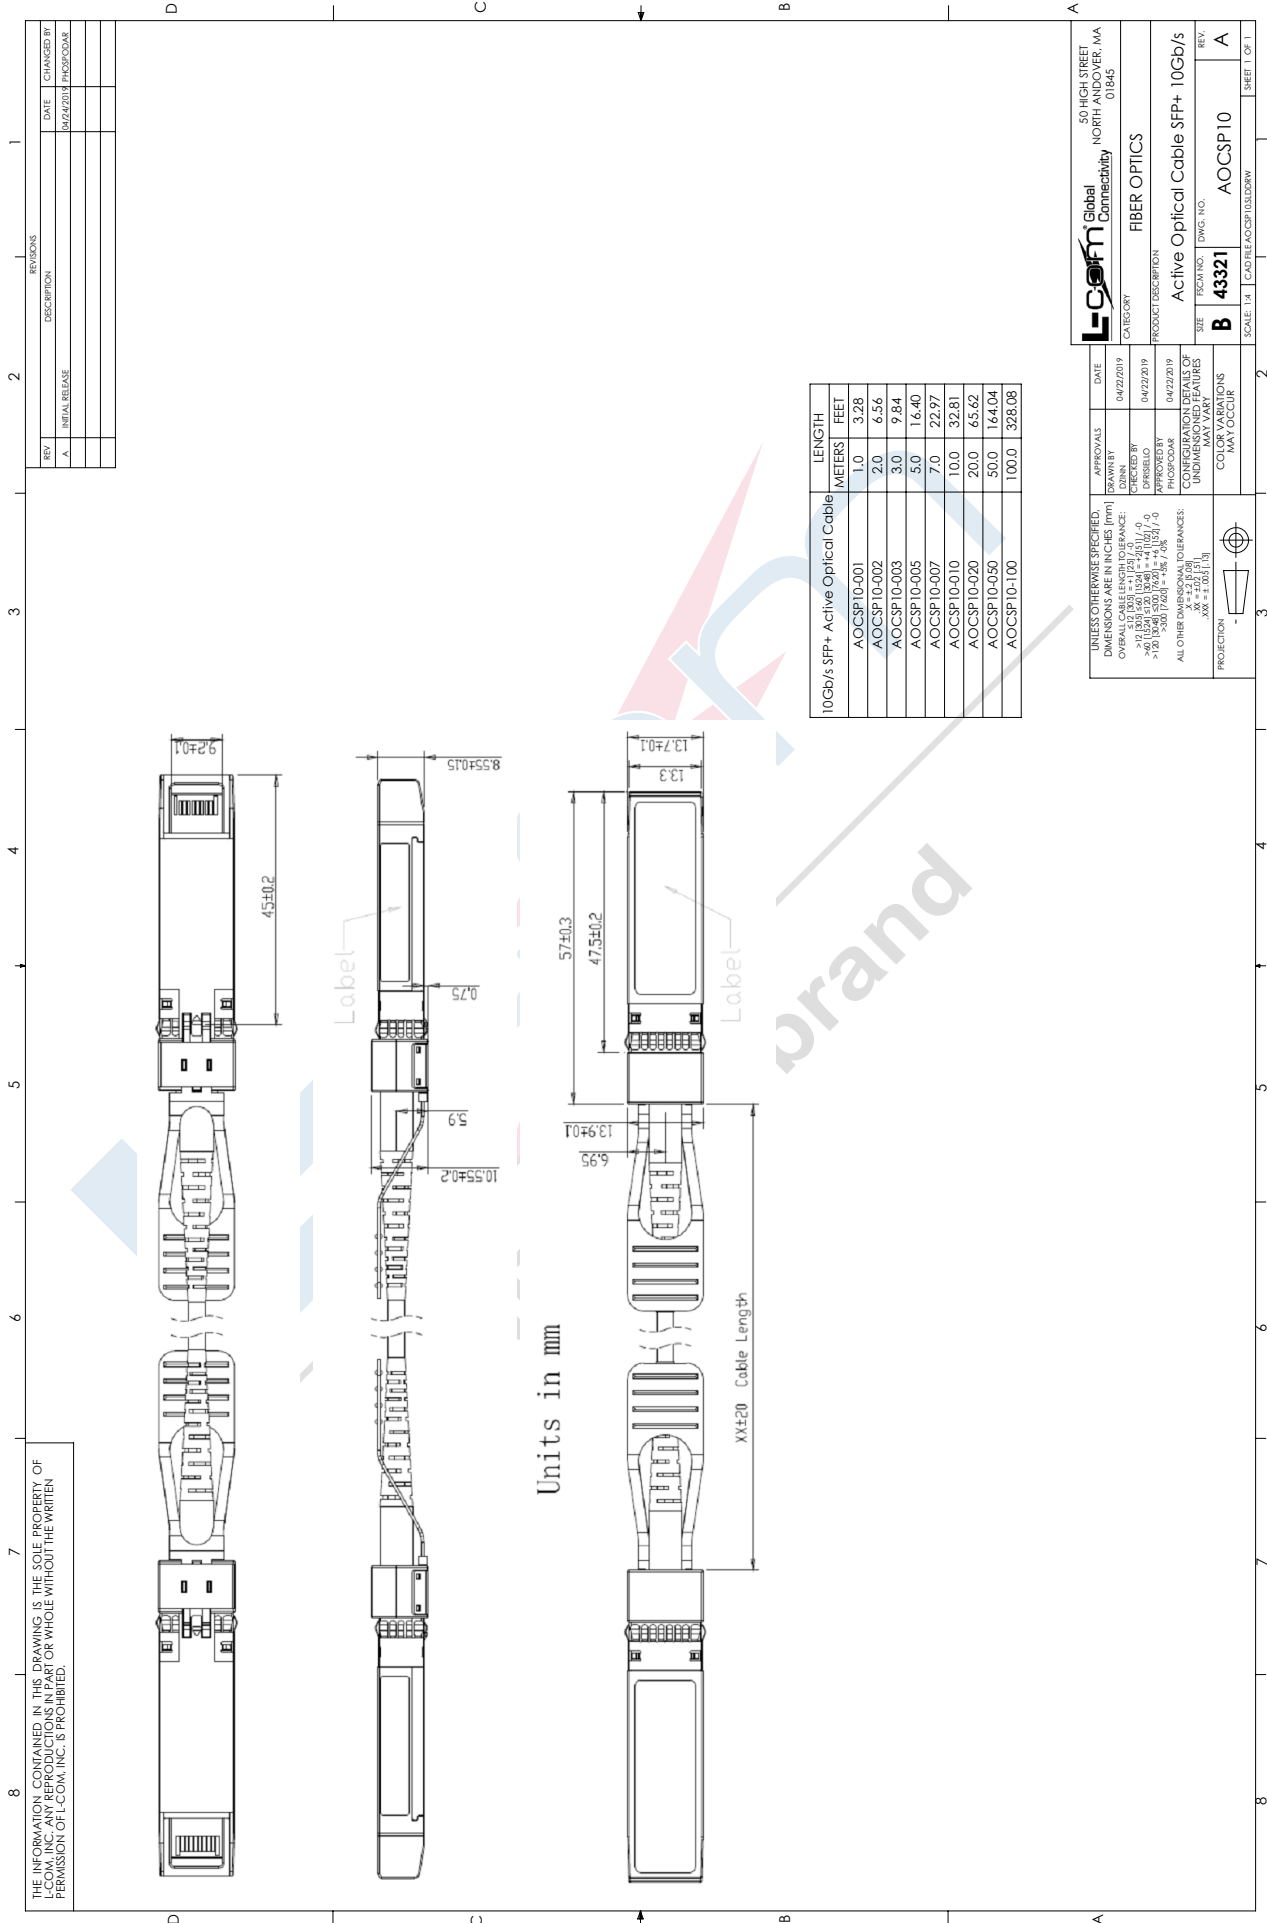

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-CORP. NO PART OF THIS DRAWING IS TO BE REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF L-CORP, INC. IS PROHIBITED.

10Gb/s SFP+ Active Optical Cable	LENGTH METERS	LENGTH FEET
AOCSP10-001	1.0	3.28
AOCSP10-002	2.0	6.56
AOCSP10-003	3.0	9.84
AOCSP10-005	5.0	16.40
AOCSP10-007	7.0	22.97
AOCSP10-010	10.0	32.81
AOCSP10-020	20.0	65.62
AOCSP10-050	50.0	164.04
AOCSP10-100	100.0	328.08

REV	DESCRIPTION	DATE	CHANGED BY
1A	INITIAL RELEASE	03/24/2019	PHOSKODAR

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE
OVERALL DIMENSIONS TOLERANCE: ±0.13 (±0.005)	DRAWN BY	04/22/2019
HOLE DIMENSIONS TOLERANCE: ±0.13 (±0.005)	CHECKED BY	04/22/2019
>100 DIMENSIONS TOLERANCE: ±0.13 (±0.005)	APPROVED BY	
>100 DIMENSIONS TOLERANCE: ±0.13 (±0.005)	PHOSKODAR	
ALL OTHER DIMENSIONAL TOLERANCES: X = ±0.008	UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	
	Y = ±0.008	
	Z = ±0.008	
	.XXX = ±0.001 (0.001)	
	PROJECTION	
	COLOR VARIATIONS MAY OCCUR	

GLOBAL CONNECTIVITY	50 HIGH STREET
	NORTH ANDOVER, MA
	01845
PRODUCT DESCRIPTION	FIBER OPTICS
ACTIVE OPTICAL CABLE SFP+ 10Gb/s	
SIZE	REV
B 43321	A
SCALE 1:1	SHEET 1 OF 1