

1. Package Contents

Thank you for purchasing WM8-4G-4GP+ industrial 8-port 10/100/1000T Wall-mounted Gigabit Ethernet Switch.

Model Name	10/100/1000T Copper Ports	802.3at PoE+ Ports	Power Adapter
WM8-4G-4GP+	8	4	DC 54V, 1.33A

In the following section, unless specified, the term “**Wall-mount Gigabit Switch**” mentioned in this user’s manual refers to the above model.

- 1 -

2. Hardware Description

2.1 Switch Front View

The front panel of the Wall-mount Gigabit Switch consists of 8 Auto-Sensing 10/100/1000Mbps Ethernet RJ45 Ports. The LED Indicators are also located on the RJ45 ports of the Wall-mount Gigabit Switch.

■ WM8-4G-4GP+ Front View



- 3 -


■ PoE Power Usage (Unit: Watt)

LED	Color	Function	
15	Amber	Off	To indicate the PoE usage is less than 7W.
		Blinks	To indicate the PoE usage is around 8W to 14W.
		Lights	To indicate the PoE usage is over 15-watt PoE power budget.
30	Amber	Blinks	To indicate the PoE usage is around 23W to 29W.
		Lights	To indicate the PoE usage is over 30-watt PoE power budget.
45	Amber	Blinks	To indicate the PoE usage is around 38W to 44W.
		Lights	To indicate the PoE usage is over 45-watt PoE power budget.
60	Amber	Blinks	To indicate the PoE usage is around 53W to 59W.
		Lights	To indicate the PoE usage is at the maximum.

- 5 -

2.4 Physical Dimensions

W x D x H: 148 x 24.2 x 134 mm

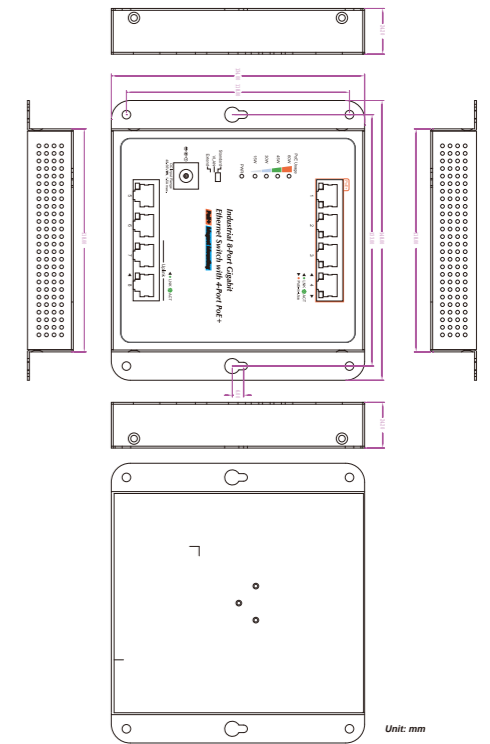

Note Model number may or may not be permanently screen printed on front of unit.

Note

- 7 -

Open the box of the Wall-mount Gigabit Switch and carefully unpack it. The box should contain the following items:

The Wall-mount Gigabit Switch x 1	User's Manual x 1	
		
Wall-mounted Kit x 1	Magnet Kit x 1	RJ45 Dust Cap x 8
		
Power Adapter x 1	Power Cord x 1	DIN-rail Kit x 1
		

- 2 -

2.2 LED Indicators




■ System and Ports

LED	Color	Function	
PWR	Green	Lights	to indicate that the Switch has power.
LNK/ACT	Green	Lights	To indicate the link through that port is successfully established.
		Blinks	To indicate that the switch is actively sending or receiving data over that port.
PoE-in-Use	Amber	Lights	To indicate the port is providing DC in-line power.
		Off	To indicate the connected device is not a PoE powered device (PD).

- 4 -

2.3 DIP Switch

The front panel of Wall-mount Gigabit Switch provides one DIP switch for **Standard**, **VLAN** and **Extend** mode selections. The detailed descriptions are shown in the following table.

DIP Switch Mode	Function
	This mode makes the Wall-mount Gigabit Switch operate as a general switch and all ports operate at 10/100/1000Mbps auto-negotiation.
	This mode makes the Wall-mount Gigabit Switch operate as a VLAN isolation switch and 1. Port 1 to port 6 will isolate respectively. 2. Port 1 to port 6 will only communicate with port 7 and port 8 (uplink ports).
	This mode makes the Wall-mount Gigabit Switch operate as a VLAN isolation switch and 1. Port 1 to port 6 will isolate respectively. 2. Port 1 to port 6 will only communicate with port 7 and port 8 (uplink ports). 3. 22~25-watt PoE transmit distance of 250m at speed of 10Mbps.



Please reboot the Wall-mount Gigabit Switch after adjusting the DIP switch.

Note


- 6 -

3. Installation


3.1 Wall-mount Installation

To install the Wall-mount Gigabit Switch on the wall, simply follow the following steps:

Step 1: Place the Wall-mount Gigabit Switch on the wall and mark the four holes with a pencil.




Step 2-1: Hammer the anchors provided into the four holes and use the four screws to tightly fix the switch onto the wall by screwing them in.

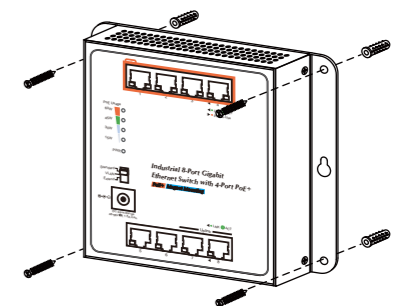

- 8 -


Step 2-2: Or the Switch, as shown in the picture below, can be hung on the wall by screwing the two screws leaving a space of 2mm apart after the anchors are hammered in.

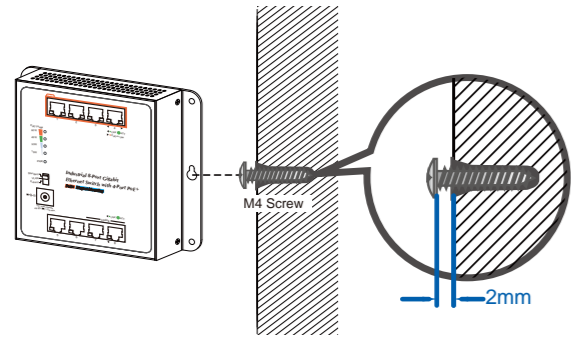

3.2 DIN-rail Mounting Installation

The DIN-rail kit is included in the Wall-mount Gigabit Switch package. To hang up the Wall-mount Gigabit Switch, follow the steps below:


Step 1: Screw the DIN-rail bracket on the Wall-mount Gigabit Switch.

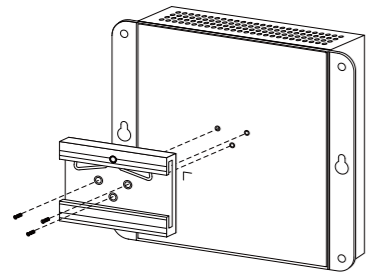

- 9 -


Step 2: Lightly press the bottom of DIN-rail bracket into the track.

Step 3: Check whether the DIN-rail bracket is tightly on the track.

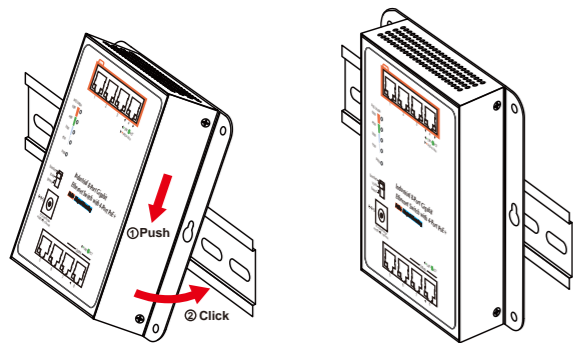

3.3 Magnet Installation

To install the Wall-mount Gigabit Switch on a magnetic surface, simply follow the following diagram:

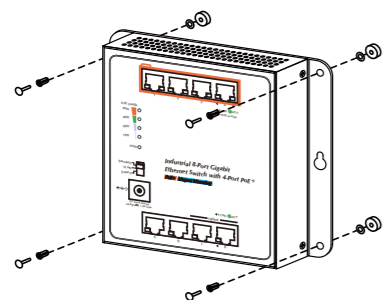

- 10 -

Appendix: Product Specifications

Model	WM8-4G-4GP+
Hardware Specifications	
Network Port Type	8x RJ45 with 10/100/1000BASE-T Auto-negotiation and auto MDI/MDI-X
PoE Capable Ports	4
Power Requirements	48~56V DC, 1.5A max.
Power Consumption	70 watts/ 239 BTU
ESD Protection	4KV DC
Surge Protection	6KV DC
DIP Switch Options	Selectable operation mode - Standard/VLAN/Extend
Enclosure Type	IP30 metal
Dimensions	148 x 24.2 x 134 mm (W x D x H)
Weight	472 g

- 11 -

Switch Specifications	
MAC Address Table	4K MAC address table with auto learning function
Data Buffer	64Kbytes
Switch Fabric	16Gbps
Switch Throughput	11.9Mpps@64bytes
Flow Control	Back pressure for half duplex. IEEE 802.3x pause frame for full duplex
Power over Ethernet	
PoE Standard	IEEE 802.3at Power over Ethernet Plus PSE Backward compatible with IEEE 802.3af PoE
PoE Type	End-span PSE
Power Pin Assignment	1/2(+), 3/6(-)
PoE Power Output	Per port 52V~54V DC, 30 watts (max.)
PoE Power Budget	60 watts

- 12 -

Customer Support

Thank you for purchasing L-com products. You can browse our online resources and User's Manuals on www.L-com.com. If you require sales or support information, please contact the L-com support team using the information found below.



L-com
50 High Street
West Mill, 3rd Floor, Suite 30
North Andover, MA 01845 USA
Toll Free: (800)-341-5266
International: (978)-68-6936
Sales and Support: Sales@L-com.com.

- 13 -



**Industrial 8-port 10/100/100T
Wall-mounted Industrial Gigabit Ethernet
Switch with 4-Port PoE+**



Model: WM8-4G-4GP+

User's Manual

- 14 -

Standard Conformance	
Standard Compliance	IEEE 802.3 Ethernet
	IEEE 802.3u Fast Ethernet
	IEEE 802.3ab Gigabit Ethernet
	IEEE 802.3x Flow Control
	IEEE 802.3af Power over Ethernet
	IEEE 802.3at Power over Ethernet Plus
	IEEE 802.3az Energy Efficient Ethernet (EEE)
Regulatory Compliance	FCC Part 15 Class A, CE
Environment	
Operating	Temperature: -10 ~ 60 degrees C
	Relative Humidity: 5 ~ 95% (non-condensing)
Storage	Temperature: -20 ~ 70 degrees C
	Relative Humidity: 5 ~ 95% (non-condensing)

Energy Saving Note of the Device – AC Adapter

This power required device does not support Standby mode operation. For energy savings, please remove the AC adapter from the device for power disconnection. Without removing the AC Adapter, the device will still consume power from the power source. In the view of Saving the Energy and reducing the unnecessary power consumption, it is strongly suggested to remove the AC adapter from the device if this device is not intended to be active.