


Thank you for choosing to use Senko's Smart Cleaner MPO optical connector cleaner. This product designed for cleaning MPO-MTP connector ferrule end face with a simple push action. Please read this user's manual carefully and follow its instructions in using this product.



- This product is intended for use as a cleaner for MPO-MTP® connector ferrule end face
- Do not use for any other purposes
- Do not use this product for cleaning lens type optical ports (such as transceivers, reception ports for optical measurement equipment, etc.)

1. Names and Descriptions of Parts

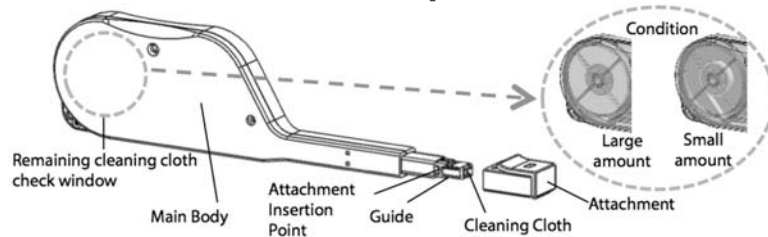

2. Specifications


Product Name (Part No.)	Compatible Connectors	Compatible End Face	# of Usages
SMART CLEANER MPO [SCK-SS-MPO]	MPO/MTP®	Flat and/or 8° w/ both guide pins and no pin	600 times

MTP® is a registered trademark of US Conec Ltd.


3. Methods of Use

Cleaning a Connector in an Adaptor


① Remove the attachment from the guide.



② Align the adaptor and the guide key. Insert the guide straight into the adaptor until the insertion mark is completely hidden.

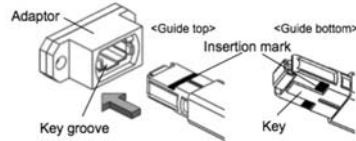

③ Push the main body straight into the adaptor. When you hear the click sound, the cleaning is completed. Stop pushing and pull straight out.




Cleaning an Optical Connector Plug

① Remove the attachment from the Guide. Align the attachment and the optical connector plug key. Insert the plug straight into the attachment and push until you hear the click sound.




When pushing in, hold the attachment firmly between your fingers.

② Align the attachment and the guide key. Insert the guide straight into the attachment and push in until it reaches the attachment insertion point.



③ Align the attachment and the guide key. Insert the guide straight into the attachment and push in until it reaches the attachment insertion point.



Senko Advanced Components, Inc.

www.senko.com/smartcleaner

Produced by NTT-AT

Americas

USA EAST +1-888-32-SENKO
USA WEST +1-858-623-3300
TEXAS 1-972-661-9080
Sales-Americas@senko.com
BRAZIL: +55-21-2430-5971
Sales-Brazil@senko.com

Asia

HONG KONG +852-2121-0516
SHANGHAI +86-21-5830-4513
SHENZHEN
+86-755-2533-4893
Sales-Asia@senko.com

Europe

UK +44 (0) 118 982 1600
ITALY +39 011 839 9828
POLAND +48-71/77-60-737
Sales-Europe@senko.com

Asia Pacific

AUSTRALIA
+61 (0) 3 9755-7922
Sales-Asia-Pacific@senko.com

Japan

TOKYO
+81 (0)3 5825-0911
Sales-Japan@senko.com
Middle East - North Africa
DUBAI +971 4 8865160
Sales-MENA@senko.com