

HyperLink Wireless brand HyperGain[®] 2.4 GHz 8 dBi Round Range Extender Antenna - Model: RE08P

Applications and Features

Applications:

- 2.4 GHz ISM Band
- IEEE 802.11b, 802.11g and 802.11n (Pre-N, Draft-N, MIMO)
- Bluetooth®, Public Wireless Hotspot
- WiF
- Wireless Video Systems



- Compact size, looks like a smoke detector
- Durable UV-stable, UL flame rated radome
- Low loss solid brass element
- Cable can be hidden when mounting
- 4 foot coax lead






Description

Looks like a Smoke Detector!

This very compact round WiFi patch antenna provides 8 dBi gain with very broad coverage. It is suitable for both indoor and outdoor applications in the 2.4GHz ISM band, including IEEE 802.11b, 802.11g and 802.11n, Bluetooth® and public wireless hotspot applications. This antenna is lightweight and features an aesthetic UV-stable, UL flame rated white plastic radome which can also be painted to match the room or building structure. The RE08P can be installed for horizontal or vertical polarization.





Specifications

Electrical Specifications

Frequency	2400-2500 MHz
Gain	8 dBi
Horizontal Beam Width	75 degrees
Vertical Beam Width	65 degrees
Impedance	50 Ohm
Max. Input Power	25 Watts
VSWR	< 1.5:1 avg.
Lightning Protection	DC Short




Mechanical Specifications

Weight	0.3 lbs. (.13 Kg)
Dimensions	4" (102 mm) Dia x 1" (25 mm)
Radome Material	UV-inhibited Polymer
Flame Rating	UL 94HB
Operating Temperature	-40° C to 85° C (-40° F to 185° F)
Mounting	Four ¼ in. (6.3 mm) Holes
Polarization	Horizontal or Vertical
Wind Survival	>150 MPH (241 KPH)
RoHS Compliant	Yes

Wind Loading Data

Wind Speed (MPH)	Loading
100	3 lb.
125	4 lb.

Antenna Gain Patterns

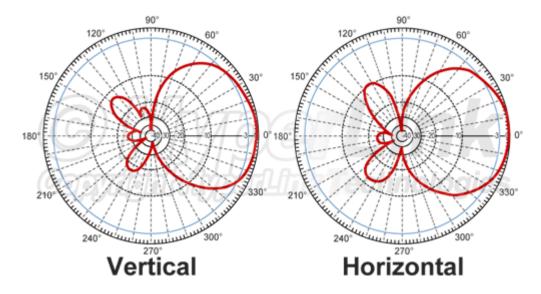

Guaranteed Quality

This product is designed and manufactured by HyperLink Technologies in the U.S.A. and is backed by Hyperlink's Limited Warranty.