
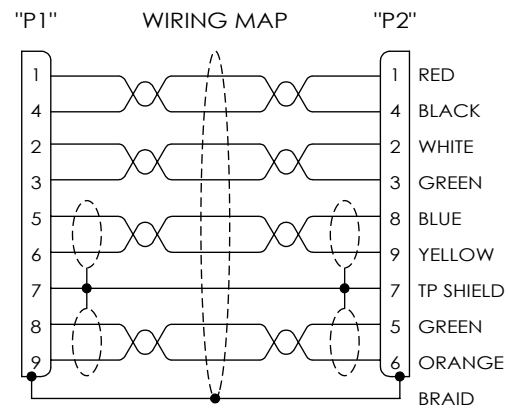


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	03/25/2024	SLI	WLI

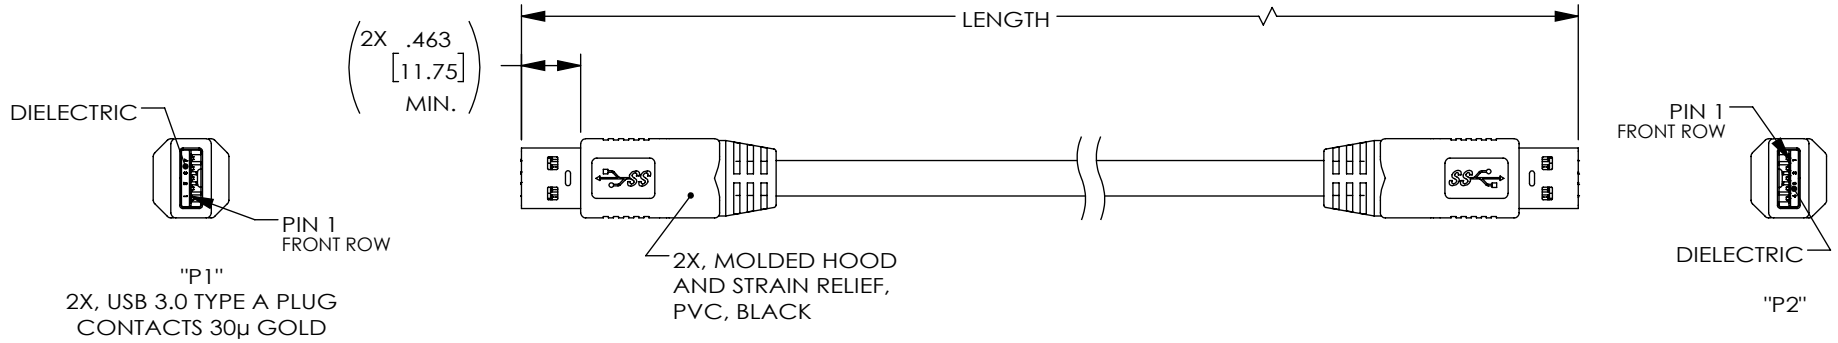



UL STYLE 20276, USB3.0 HIGH FLEX CABLE,  
 (2) TWISTED PAIR, 28AWG WITH ALUM/POLY, DRAIN WIRE AND SPIRAL SHIELD,  
 (1) UNSHIELDED TWISTED PAIR, 26AWG,  
 (1) UNSHIELDED TWISTED PAIR, 22AWG,  
 OVERALL ALUM/POLY AND BRAIDED SHIELD,  
 JACKET: PVC, BLACK  
 (NOM DIA. .276" [7.0]; FLAME RATING: UL VW-1;  
 MIN. FIXED BEND RADIUS: 5X O.D.;  
 MIN. MOVING BEND RADIUS: 10X O.D. )

PART NUMBER	LENGTH METERS [FEET]
CAU3HFAA-BLK-208M	2.8 [9.19]
CAU3HFAA-BLK-3M	3.0 [9.84]
CAU3HFAA-BLK-4M	4.0 [13.12]
CAU3HFAA-BLK-5M	5.0 [16.40]

**NOTES:**

- CABLE TYPE-U DRAG CHAIN TESTING:  
5 MILLION CYCLES MIN.(75mm BEND RADIUS)
- CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
- CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
- CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

**REGULATORY COMPLIANCE:**  
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [.5]   ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY SLI	03/05/2024	
	CHECKED BY WLI	03/05/2024	
	APPROVED BY WLI	03/05/2024	
THIRD-ANGLE PROJECTION	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	CATEGORY <b>USB</b>	
	COLOR VARIATIONS MAY OCCUR	PRODUCT DESCRIPTION <b>CA, USB3.0 A/A HIGH FLEX DRAG CHAIN</b>	
SIZE <b>A</b>		CAGE CODE <b>43321</b>	ITEM NO. <b>CAU3HFAA-BLK-L</b>
SCALE: NONE		CAD FILE: CAU3HFAA-BLK-LSLDDRW	REV. <b>A</b>