


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/17/14	D.GRIFFIN

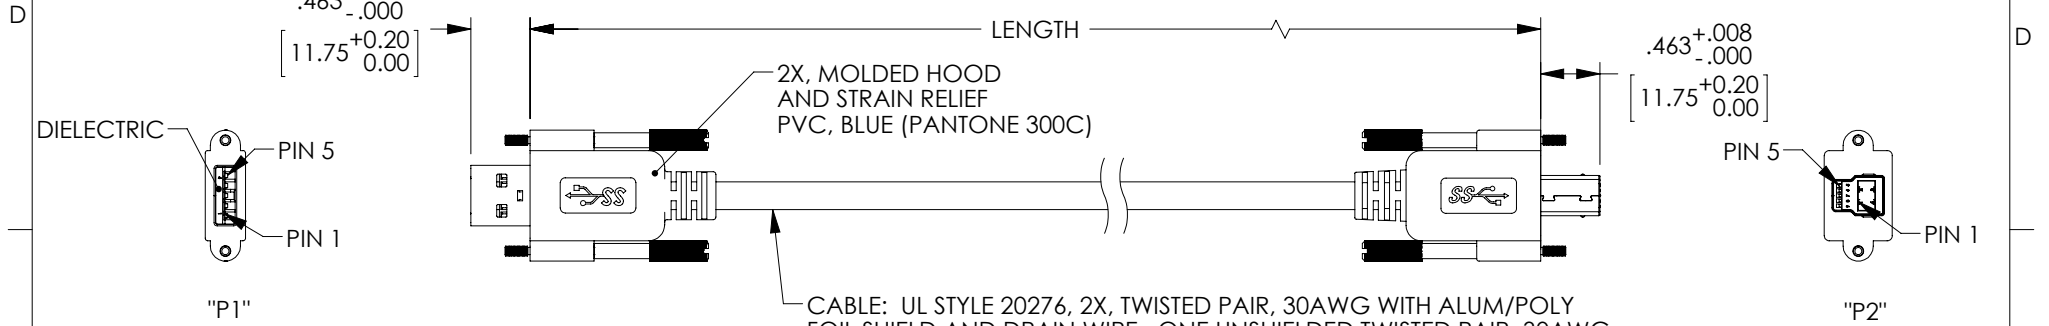

"P1"
 SERIES "A"
 USB 3.0 PLUG
 CONTACTS: 30μINCHES
 GOLD PLATING


"P2"
 SERIES "B"
 USB 3.0 PLUG
 CONTACTS: 30μINCHES
 GOLD PLATING

CABLE: UL STYLE 20276, 2X, TWISTED PAIR, 30AWG WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE. ONE UNSHIELDED TWISTED PAIR, 30AWG. 2 COND., 24AWG. OVERALL BRAID SHIELD, 65% JACKET: PVC, BLUE (PANTONE 300C)



"P1" WIRING MAP "P2"

1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	3
5	BLUE	4
6	YELLOW	5
6	DRAIN WIRE	6
7	DRAIN WIRE	7
8	PURPLE	8
9	ORANGE	9
SHELL	BRAID	SHELL

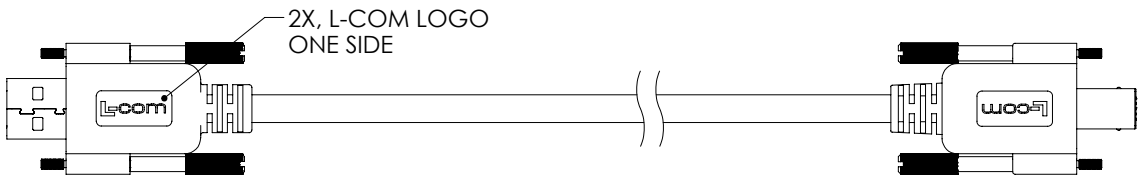

MODEL NUMBER	LENGTH METERS [FEET]
CAVISU3AB-2-03M	0.3 [.98]
CAVISU3AB-2-05M	0.5 [1.64]
CAVISU3AB-2-1M	1.0 [3.28]
CAVISU3AB-2-2M	2.0 [6.56]
CAVISU3AB-2-3M	3.0 [9.84]
CAVISU3AB-2-5M	5.0 [16.41]

NOTES:
MISCELLANEOUS:
 CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
 CABLE ASSEMBLY MUST MEET USB 3.0 REQUIREMENTS.
 CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.FRISIELLO	2/14/14		CATEGORY
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [1.51] .XXX = ±.005 [1.13]	CHECKED BY D.DESJARDIN	2/14/14	PRODUCT DESCRIPTION	CA USB3.0 A/B 2X HDW
PROJECTION	APPROVED BY S. SMITH	2/14/14	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	REV. A
	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. CAVISU3AB-2
		SCALE: NONE	CAD FILE: CAVISU3AB-2.SLDRW	SHEET 1 OF 1