


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISION					
ZONE	REV	DESCRIPTION	DATE	CHANGED BY	APPROVED
	A	INITIAL RELEASE	01/06/2025	BZHANG	WLI

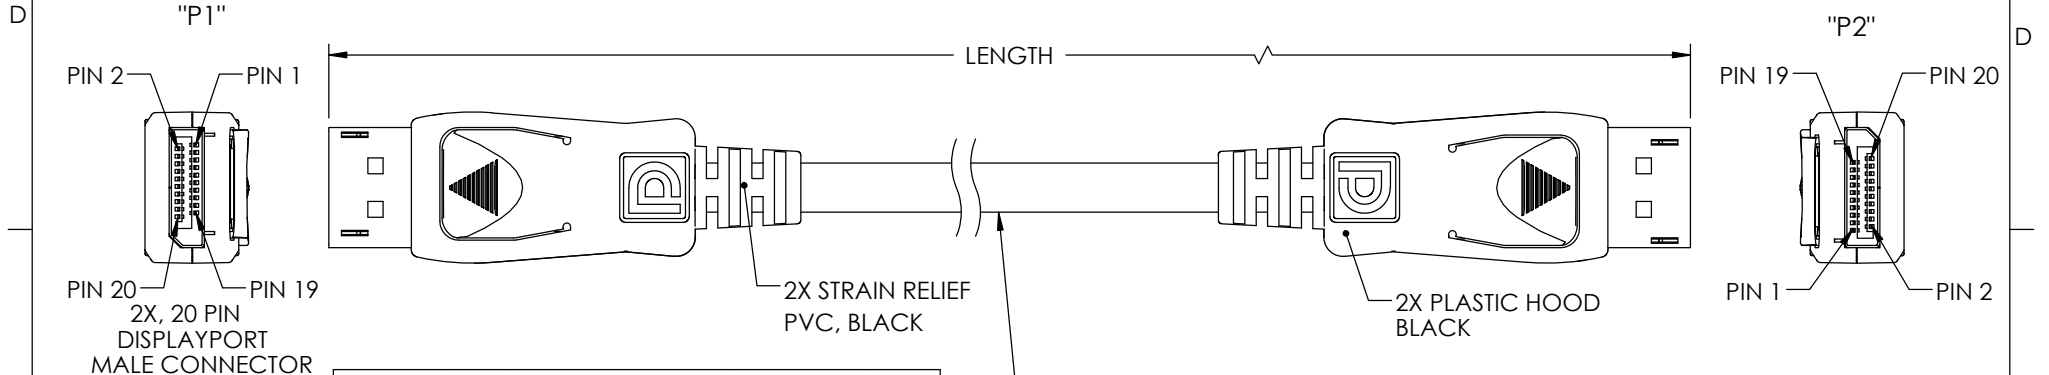



WIRING MAP				
CABLE	"P1"	SIGNAL NAME	COLOR	"P2"
TWISTED PAIR 1	1	ML_LANE 0(p)	BROWN	12
	2	GND	DRAIN	11
	3	ML_LANE 0(n)	WHITE	10
TWISTED PAIR 2	4	ML_LANE 1(p)	RED	9
	5	GND	DRAIN	8
TWISTED PAIR 3	6	ML_LANE 1(n)	WHITE	7
	7	ML_LANE 2(p)	GREEN	6
TWISTED PAIR 4	8	GND	DRAIN	5
	9	ML_LANE 2(n)	WHITE	4
TWISTED PAIR 5	10	ML_LANE 3(p)	ORANGE	3
	11	GND	DRAIN	2
	12	ML_LANE 3(n)	WHITE	1
	13	GND	BROWN	13
	14	GND	RED	14
TWISTED PAIR 5	15	AUX CH(p)	BLUE	15
	16	GND	DRAIN	16
	17	AUX CH(n)	WHITE	17
	18	HOT PLUG DETECT	YELLOW	18
	19	DP_PWR RETURN	ORANGE	19
	20	N/A	N/C	20
	SHELL	GND	BRAID	SHELL

UL LIST DISPLAYPORT CABLE
 (5) SHIELDED TWISTED PAIR 30AWG WITH 30 AWG DRAIN WIRE.
 (4) 30 AWG SINGLE CONDUCTORS.
 OVERALL ALUMINIZED POLYESTER FOIL WITH TINNED COPPER BRAID SHIELDING
 PVC JACKET: BLACK.(NOM. DIAM. 6.5mm)

PART NUMBER	LENGTH	
	METERS	FEET
DPCAMM-4	4.0	13.12
DPCAMM-5	5.0	16.40

- NOTES:
 1. CABLE ASSEMBLIES SHALL BE TESTED FOR CONTINUITY.
 2. CABLE ASSEMBLIES SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.
 3. TEMPERATURE RATING: -10°C TO +80°C.

REGULATORY COMPLIANCE:
 EU RoHS DIRECTIVE (MOST RECENT RELEASED VERSION)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [5] ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY BZHANG	12/05/2024	
	APPROVED BY WLI	12/05/2024	CATEGORY AUDIO/VIDEO
THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION CA DISPLAYPORT M/M	
	COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321
		DWG. NO. DPCAMM-CN	REV. A
		SCALE: NONE	CAD FILE: DPCAMM-CN.SLDDRW
			SHEET 1 OF 1