


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 10800: ADDED VALUES -01D, -02D, -03D, -07D, -12D, -18D	11/11/2020	PHOSPODAR

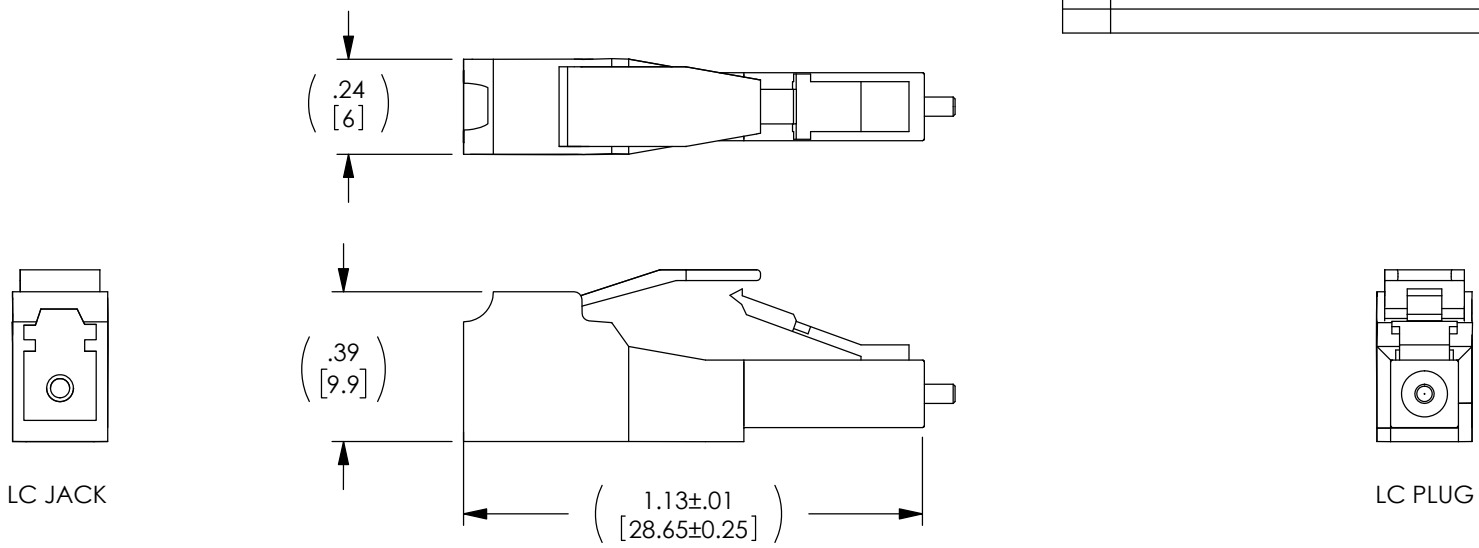

MODEL	ATTENUATION	BACK REFLECTION
FOATLCU-01D	1dB	≤ -55dB
FOATLCU-02D	2dB	≤ -55dB
FOATLCU-03D	3dB	≤ -55dB
FOATLCU-05D	5dB	≤ -55dB
FOATLCU-07D	7dB	≤ -55dB
FOATLCU-08D	8dB	≤ -55dB
FOATLCU-10D	10dB	≤ -55dB
FOATLCU-12D	12dB	≤ -55dB
FOATLCU-15D	15dB	≤ -55dB
FOATLCU-18D	18dB	≤ -55dB
FOATLCU-20D	20dB	≤ -55dB
FOATLCU-25D	25dB	≤ -55dB

**NOTES:**

- ATTENUATOR UTILIZES "UPC" POLISH.
- OPERATING TEMPERATURE RANGE: -40° C TO +75° C.
- SINGLE MODE WAVELENGTH RANGE: 1310-1550 nm.
- ATTENUATOR IS PACKAGED TWO WITH DUST CAPS INSTALLED (NOT SHOWN).
- ATTENUATOR SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5]   FRACTIONS ± 1/32 .XX = ± .02 [5]   ANGLES ± 1° .XXX = ± .005 [13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DFRISIELLO	10/23/2007	
THIRD-ANGLE PROJECTION 	CHECKED BY D.PARHAM	10/23/2007	PRODUCT DESCRIPTION <b>FIBER LC UPC ATTENUATOR</b>
	APPROVED BY P.MC NEIL	10/23/2007	SCALE: NONE   CAD FILE: FOATLCU.SLDDRW   SHEET 1 OF 1
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SIZE <b>A</b>   CAGE CODE <b>43321</b>   ITEM NO. <b>FOATLCU</b>   REV. <b>E</b>