
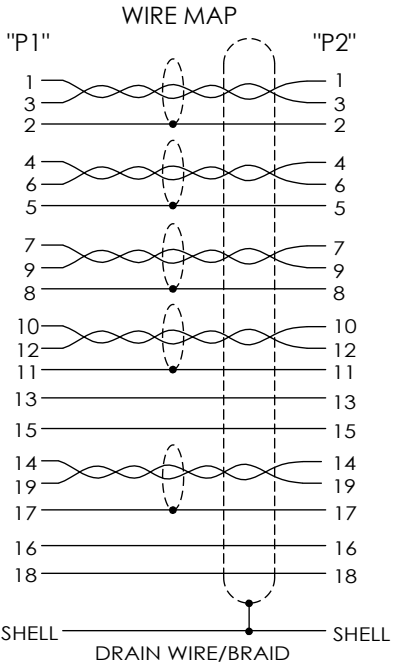


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN9020; REVISE NOTES TO REMOVE HDMI LABEL	12/22/2017	B.ZHANG

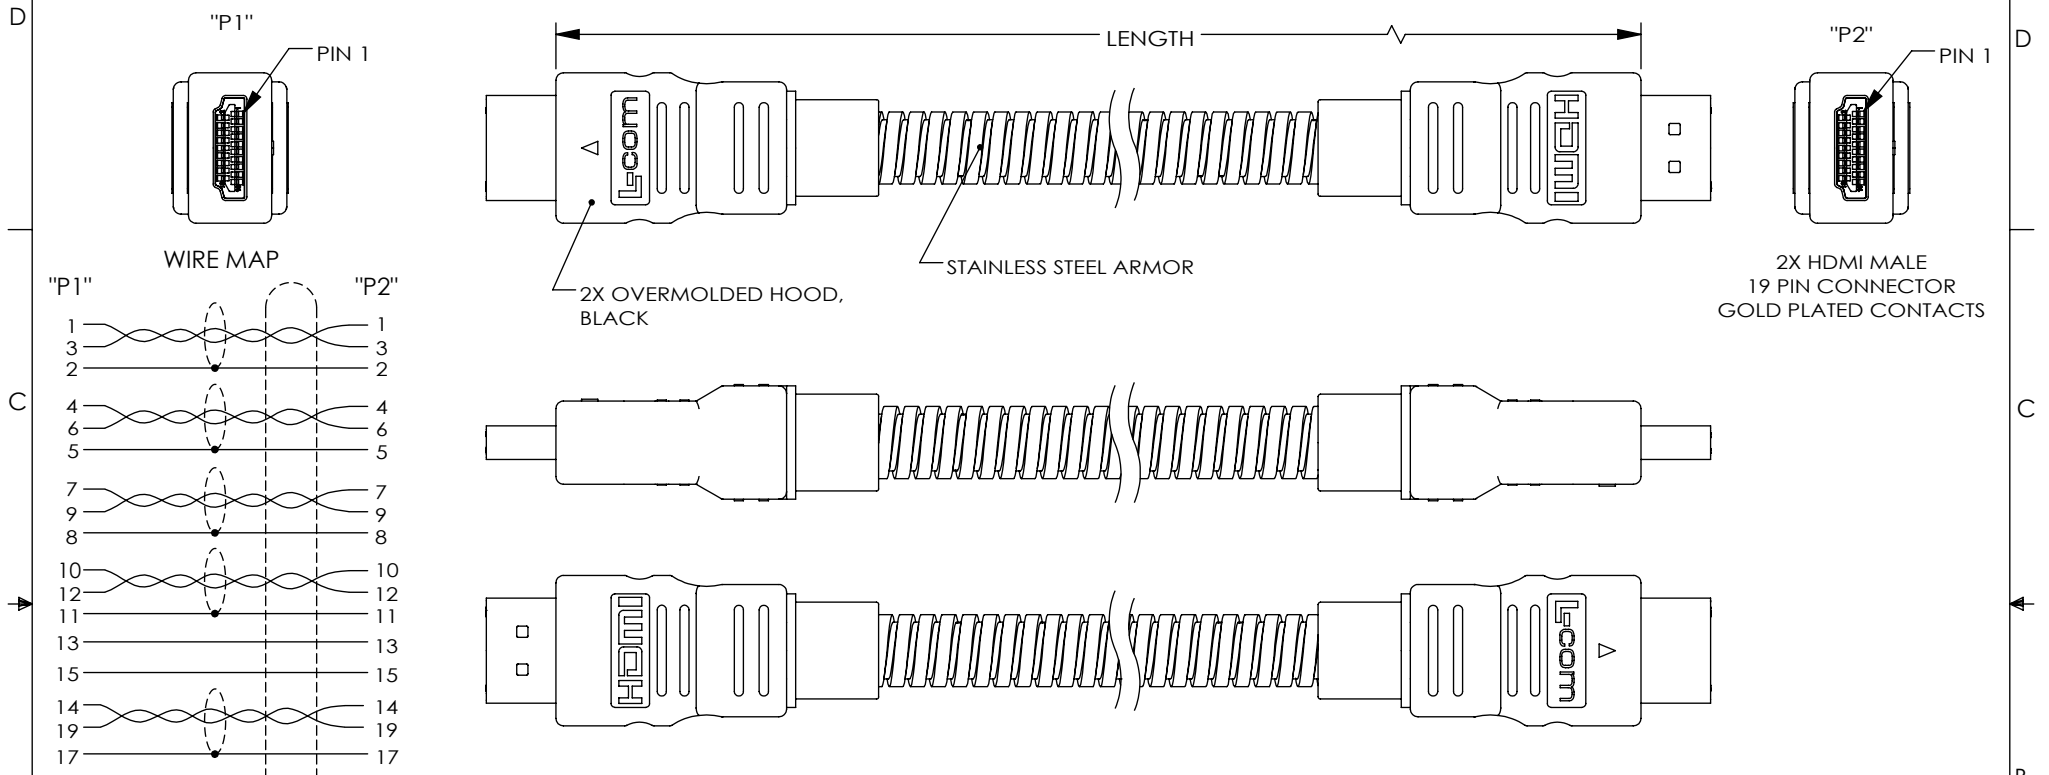

2X HDMI MALE  
19 PIN CONNECTOR  
GOLD PLATED CONTACTS

PART NUMBER	LENGTH	
	METERS	FEET
HDCAMT-0.5	0.5	1.64
HDCAMT-1	1.0	3.28
HDCAMT-2	2.0	6.56
HDCAMT-3	3.0	9.84
HDCAMT-4	4.0	13.12
HDCAMT-5	5.0	16.40

**CABLE:**  
UL STYLE 20276,  
(5) INDIVIDUALLY SHIELDED TWISTED PAIRS, 28AWG, WITH DRAIN WIRE,  
(4) INDIVIDUAL CONDUCTORS, 28AWG,  
OVERALL SHIELD: ALUMINUM MYLAR PLUS BRAIDED TINNED COPPER,  
OUTER JACKET: PVC, BLACK

- NOTES:**
- METAL CRUSH RESISTANCE: 1500 PSI (MIN).
  - CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
  - CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPEC. PS-0031.
  - DUST COVERS INSTALLED FOR SHIPPING (NOT SHOWN).

**REGULATORY COMPLIANCE:**  
CE2011/65/EU(RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE		45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845		
	DRAWN BY D. PARHAM	10/21/2011		CATEGORY AUDIO/VIDEO		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 [5.08] .XX = ±.02 [.51] .XXX = ±.005 [0.13]	CHECKED BY D. CASTRO	10/21/2011	<b>PRODUCT DESCRIPTION</b> CA HDMI METAL ARMOR			
	APPROVED BY P. McNEIL	10/24/2011				
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	DWG. NO. HDCAMT	REV. <b>E</b>
SCALE: NONE			CAD FILE: HDCAMT.SLDDRW		SHEET 1 OF 1	