


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	12/30/2019	GUTTADAURO

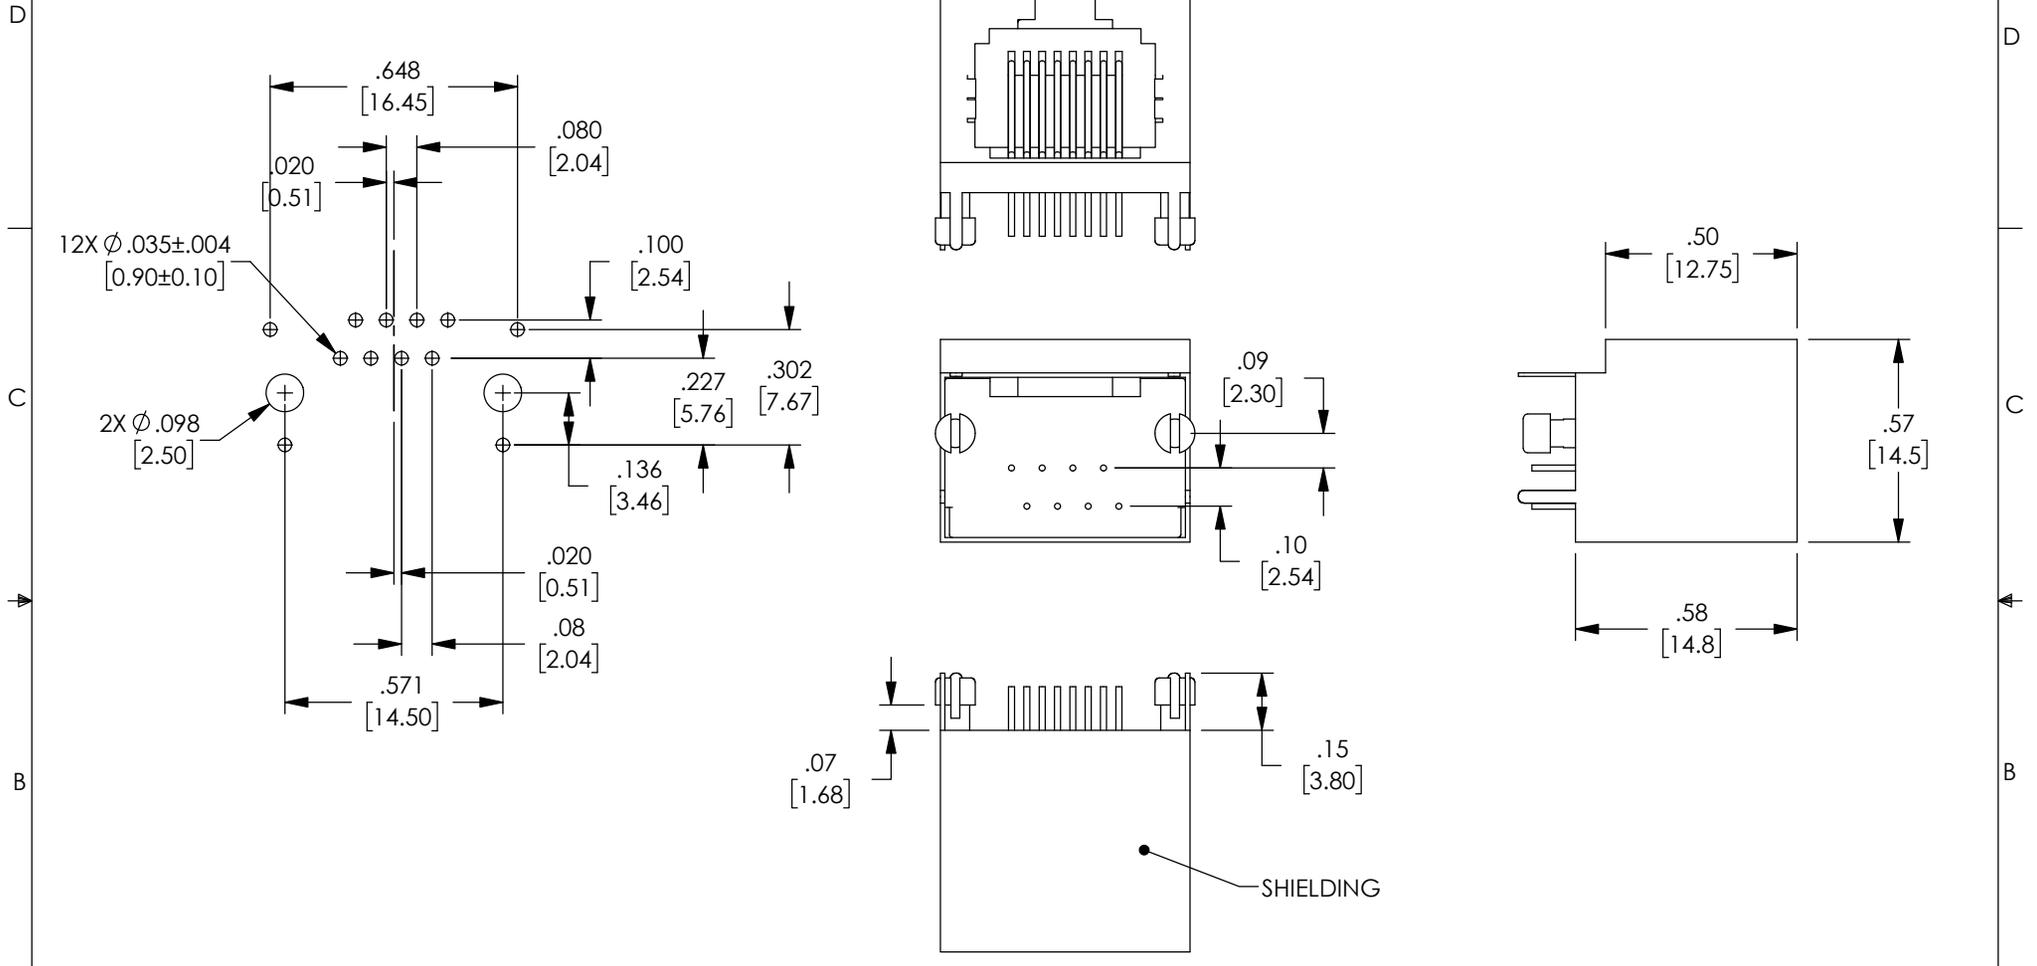


SPECIFICATIONS:

HOUSING: GLASS FILLED PBT, UL 94V-0, BLACK
 CONTACTS: $\varnothing 0.46\text{mm}$ [.018"] PHOSPHOR BRONZE,
 30 μ INCHES GOLD OVER NICKEL PLATING.

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS	DATE	 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	DRAWN BY DFRISIELLO	12/30/2019	
THIRD-ANGLE PROJECTION 	APPROVED BY GUTTADAURO	12/30/2019	PRODUCT DESCRIPTION RJ45 Surface Mount Jack Shielded 90°, 30um, Silver
COLOR VARIATIONS MAY OCCUR	SIZE A	CAGE CODE 43321	DWG. NO. SMJ-RJ45S90
SCALE: NONE		CAD FILE: SMJ-RJ45S90.SLDRW	
			SHEET 1 OF 1