


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	09/29/2020	MBLACKWOOD

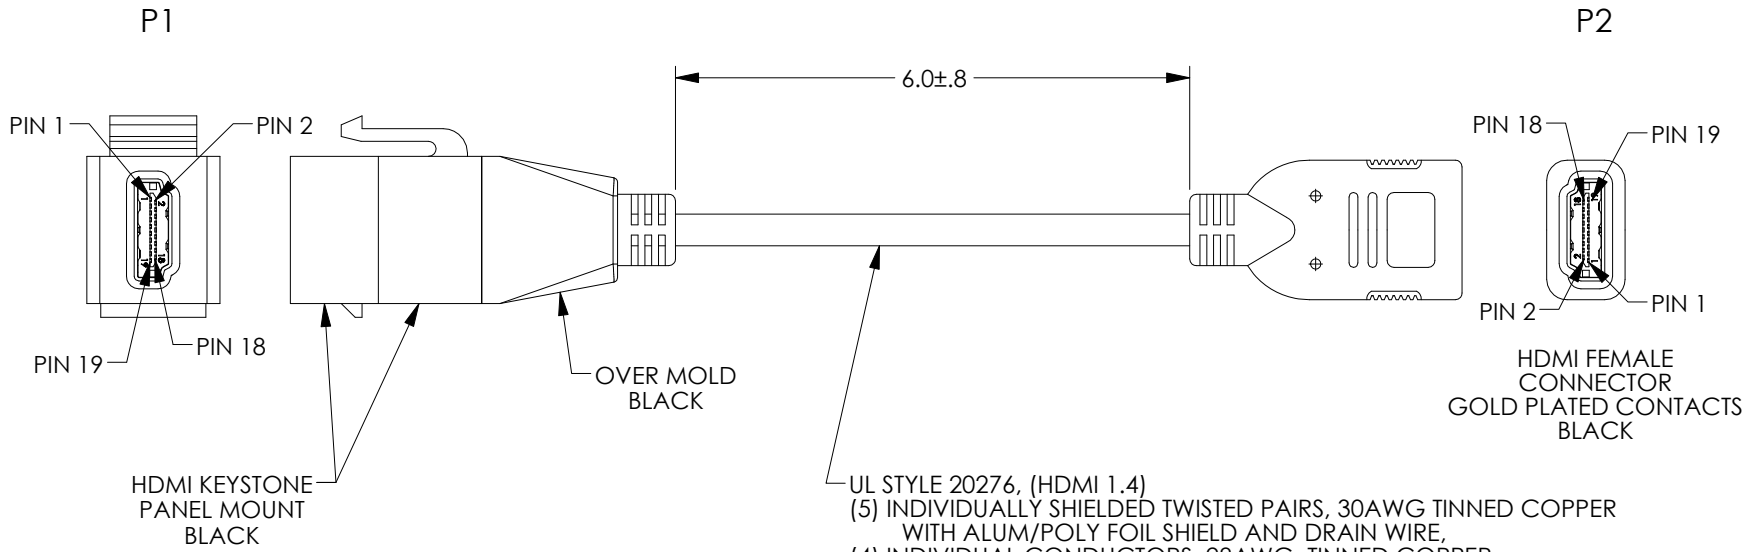



UL STYLE 20276, (HDMI 1.4)
 (5) INDIVIDUALLY SHIELDED TWISTED PAIRS, 30AWG TINNED COPPER WITH ALUM/POLY FOIL SHIELD AND DRAIN WIRE,
 (4) INDIVIDUAL CONDUCTORS, 28AWG, TINNED COPPER
 OVERALL SHIELD: ALUMINUM MYLAR PLUS BRAIDED SHIELD
 OUTER JACKET: PVC, BLACK

PIN OUT

P1	P2 COLOR	P1	P2 COLOR
1	1 BROWN	10	10 GREEN
3	3 WHITE	12	12 WHITE
5	5 D.W	8	8 D.W
4	4 RED	14	14 BLUE
6	6 WHITE	19	19 WHITE
2	2 D.W	17	17 D.W
7	7 ORANGE	15	15 RED
9	9 WHITE	16	16 PURPLE
11	11 D.W	18	18 ORANGE
13	13 GRAY	S	S BRAID

NOTES:

1. COMPONENT SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY BPUCHASKI CHECKED BY DFRISIELLO APPROVED BY MBLACKWOOD	DATE 09/29/2020 09/22/2020 09/29/2020	 an INFINIT® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR	CATEGORY AUDIO VIDEO	
THIRD-ANGLE PROJECTION 	SIZE A SCALE: NONE	CAGE CODE 43321 CAD FILE: vhc00031.SLDDRW	ITEM NO. VHC00031 SHEET 1 OF 1