


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
E	ECN 10277: REVISED DIMENSIONS L X W X H, COLOR BLACK TO WHITE	12/30/2019	BGATES
F	ECN 10297: REVISE PVC WHITE TO BLACK, ADD .81 DIM	01/08/2020	MBLACKWOOD

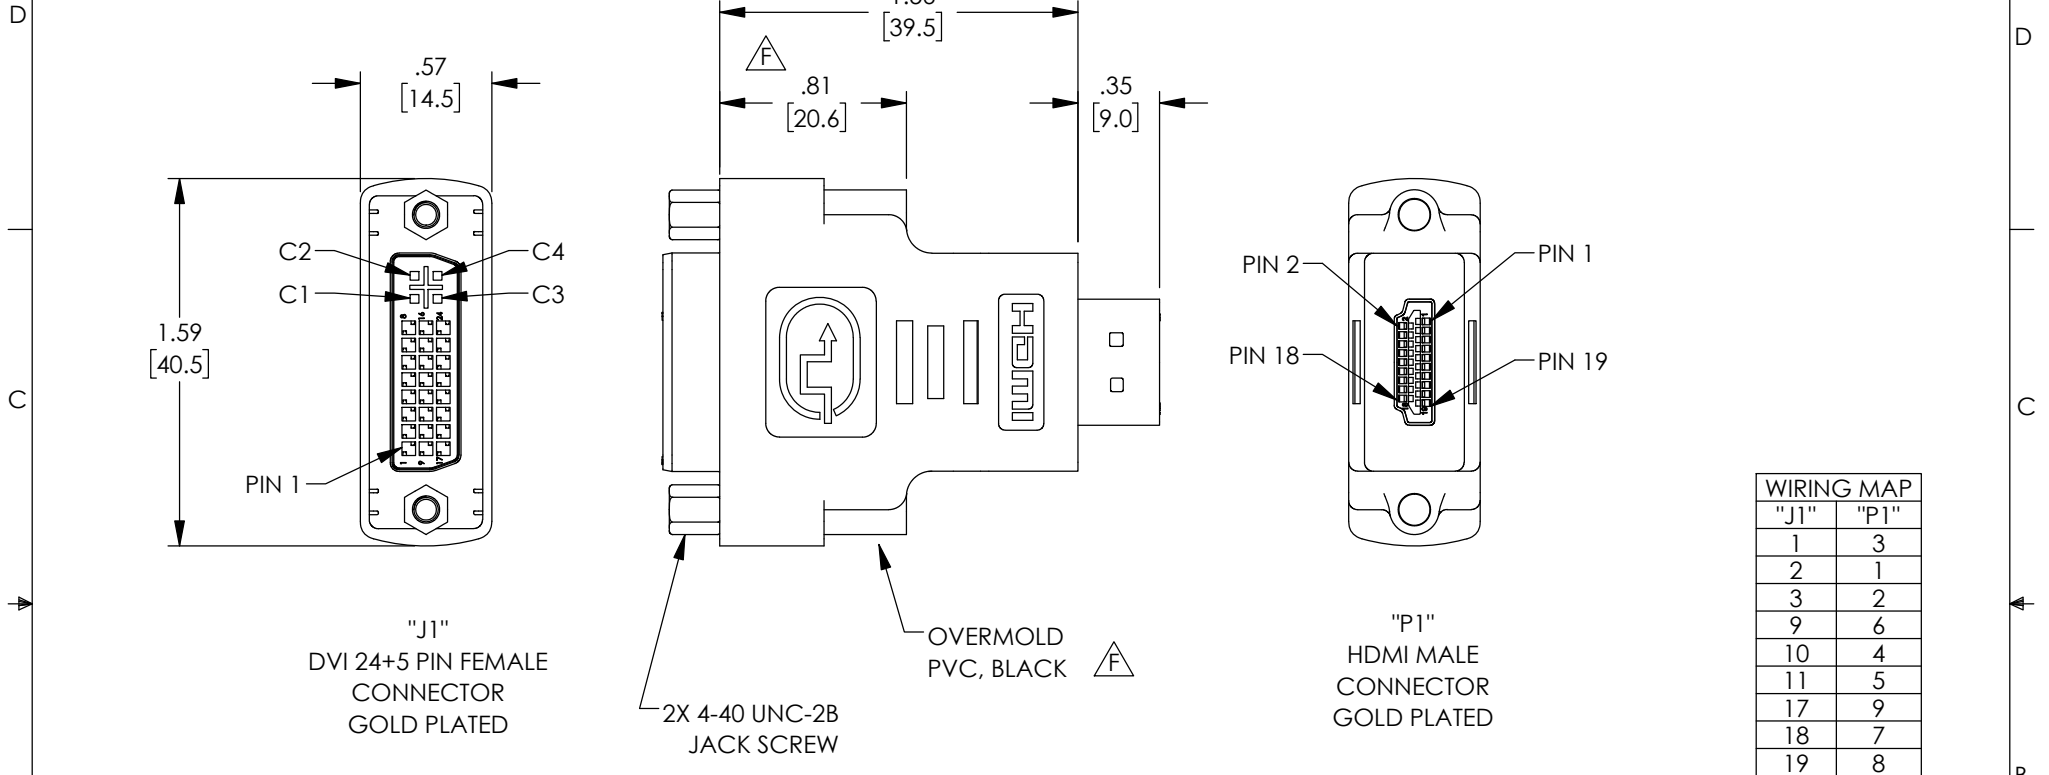

WIRING MAP	
"J1"	"P1"
1	3
2	1
3	2
9	6
10	4
11	5
17	9
18	7
19	8
24	12
23	10
22	11
6	15
7	16
14	18
15	17
16	19
SHELL	SHELL

NOTES:

- ADAPTER SHALL HAVE NO OPEN/SHORTS, MISWIRING OR INTERMITTENT FAILURES
- ADAPTER SHALL BE 100% ELECTRICALLY TESTED
- VOLTAGE TEST: DC 300V 10MS
INSULATION RESISTANCE: 5.0M OHM/MIN
CONDUCTOR RESISTANCE: 5.0M OHM/MAX.
- ADAPTER SHALL BE INDIVIDUALLY PACKAGED IN CLEAR POLY- BAG IN ACCORDANCE WITH L-COM SPEC. LSP-010-2
- ALL DIMENSIONS ARE FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +5% / -0 ALL OTHER DIMENSIONAL TOLERANCES: .X = ± .2 [5] FRACTIONS ± 1/32 .XX = ± .02 [.5] ANGLES ± 1° .XXX = ± .005 [.13]	APPROVALS DRAWN BY JYOU CHECKED BY BGATES APPROVED BY BGATES	DATE 07/07/2017 07/07/2017 07/07/2017	 an INFINIT® brand 50 High Street, West Mill, North Andover, MA 01845 USA. Phone: 1.800.341.5266 1.978.682.6936	
	THIRD-ANGLE PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY COLOR VARIATIONS MAY OCCUR		CATEGORY AUDIO/VIDEO
REF	SIZE A	CAGE CODE 43321	DWG. NO. VIC00008	REV. F
SCALE: NONE		CAD FILE: VIC00008.SLDDRW		SHEET 1 OF 1